

Avro 60530

Heavy Duty Microstop "Jumbo"


- Spindle mounted on 6 ball bearings.
- Bearings protected by dust shields.
- Stainless steel bearing body.
- Stainless steel lock Nut left hand .
- 3/8" (9.52 mm) Shank with 3 Flats.
- 9/16" (14 mm) Shaft Travel.
- 1.102" (28 mm) Cutter Capacity.
- 0.001" (0.025mm) Increment Depth Adjustment
- Rated at 10,000 RPM .

Model	Shaft	No-Mar Foot piece	Stainless Foot piece	Vacuum
		A60018D	A60018S	
60530	3/8-24	STD	X	NO
60530M8	M8 X 1	STD	X	NO
60530M10	M10 X 1	STD	X	NO

Note: X = To be confirmed



Technical informations (mm)

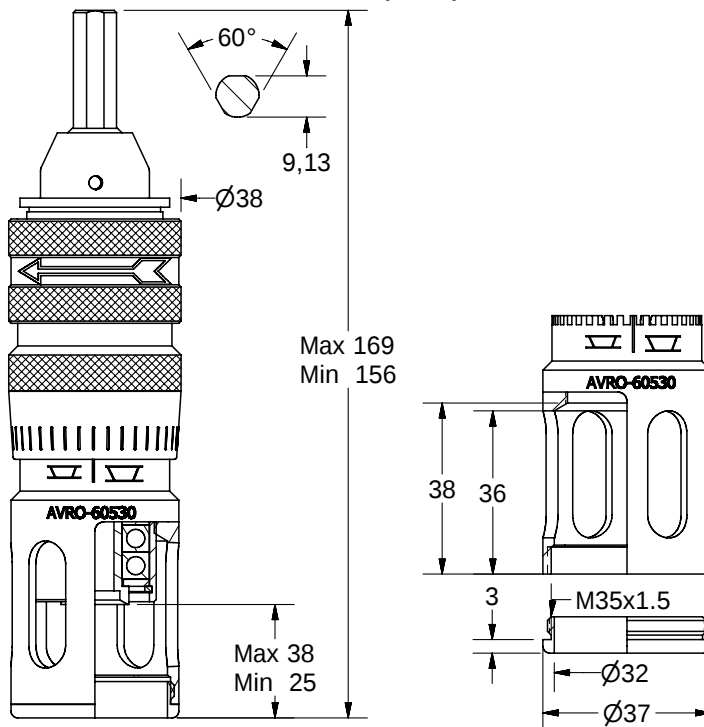

4175 BOUL.Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-886-874-9444
F: 514-336-0277 | 1-888-336-0544
info@avrotools.com

B

avrotools.com