

Avro 60600


Heavy Duty Microstop “JumboMax”

- Spindle mounted on 6 ball bearings.
- Bearings protected by dust shields.
- Stainless steel bearing body.
- Stainless steel lock Nut left hand .
- 3/4" (9.52 mm) Shank with 3 Flats.
- 3" (76.2 mm) Shaft Travel.
- 1.850" (47 mm) Cutter Capacity.
- 0.001" (0.025 mm) Increment Depth Adjustment
- Rated at 2,000 RPM .

Model	Shaft
60600	5/8 - 18
60600A	1" - 14

This **JumboMax** feature is designed to accomodate Taper-Lok Cutters

Technical information (mm)

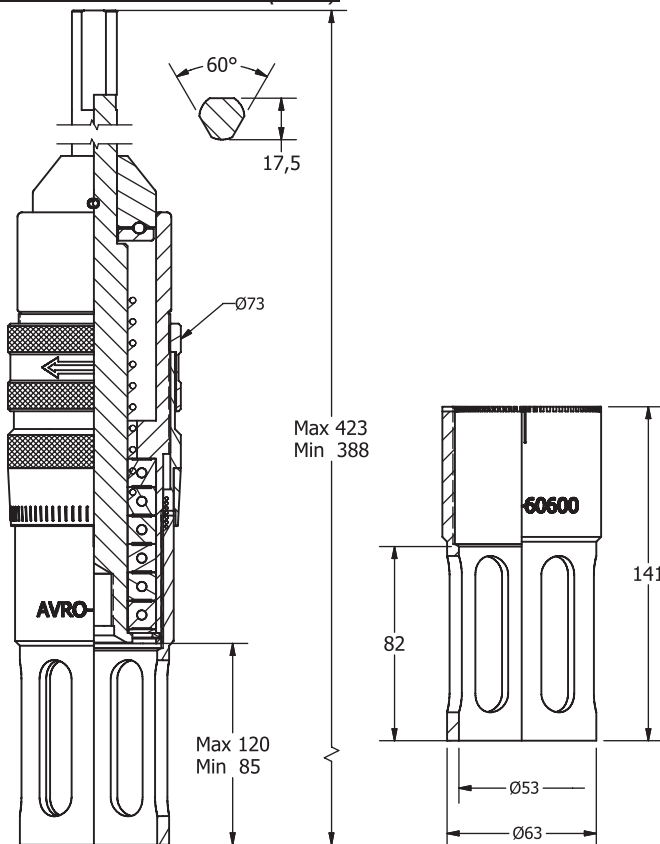

4175 boul. Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-866-874-9444
F: 514-336-0277 | 1-888-336-6055
info@avrotools.com

B

avrotools.com