

# Avro 66003S

## Avro **Ball Bearing** Microstop


- Spindle mounted on 4 ball bearings.
- Bearings protected by dust shields.
- Stainless steel bearing body.
- Stainless steel lock Nut left hand .
- .275" (7mm) Shank.
- 5/16" (8 mm) Shaft Travel.
- 3/4" (19.05mm) Cutter Capacity.
- 0.0005" (0.0106mm) Increment Depth Adjustment
- Rated at 10,000 RPM .

| Model           | Shaft         | No-Mar<br>Foot Pices | stainless<br>Foot Pices | Vacuum   |
|-----------------|---------------|----------------------|-------------------------|----------|
|                 |               | A60010               | A60009                  | A66003   |
| <b>66003S</b>   | <b>1/4-28</b> | <b>STD</b>           | <b>X</b>                | <b>X</b> |
| <b>66003SM6</b> | <b>M6 x 1</b> | <b>STD</b>           | <b>X</b>                | <b>X</b> |
| <b>66003SM8</b> | <b>M8 x 1</b> | <b>STD</b>           | <b>X</b>                | <b>X</b> |

Note: X=To be confirmed



*Technical information (mm)*

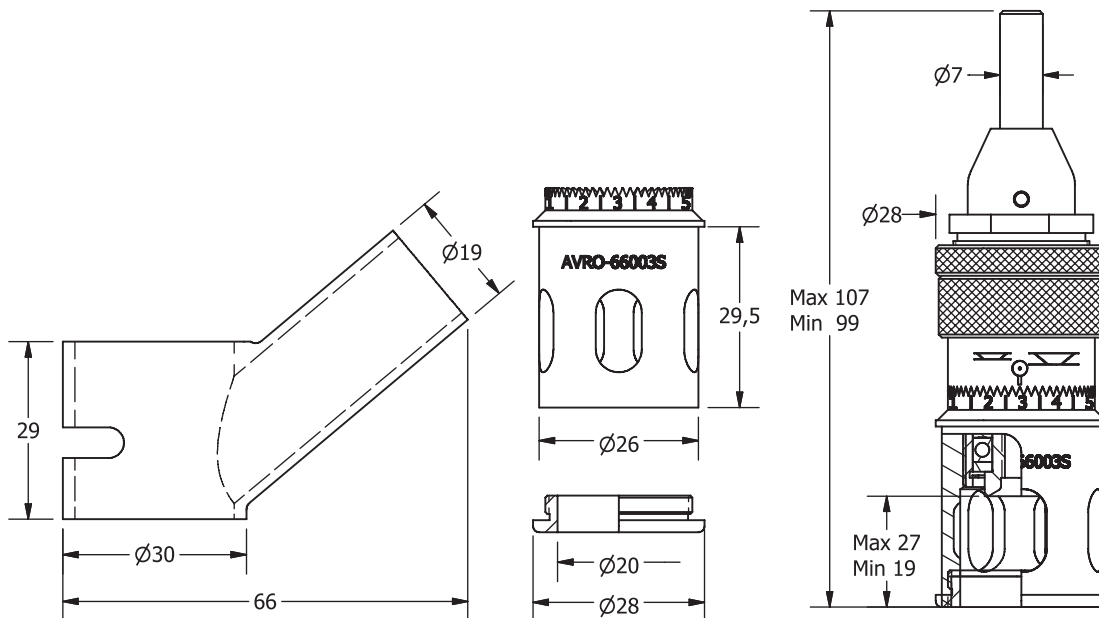

4175 boul. Poirier  
Montréal, Québec, Canada H4R 2G9  
T: 514-336-9444 | 1-866-874-9444  
F: 514-336-0277 | 1-888-336-6055  
info@avrotools.com

B

avrotools.com