

Avro Ball Bearing Microstop


- Spindle mounted on 4 ball bearings.
- Bearings protected by dust shields.
- Stainless steel bearing body.
- Stainless steel lock Nut left hand .
- .275" (7mm) Shank.
- 5/16" (8 mm) Shaft Travel.
- 7/8" (22.225mm) Cutter Capacity.
- 0.0005" (0.0106mm) Increment Depth Adjustment
- Rated at 10,000 RPM .

Model	Shaft	No-Mar Foot Pices	stainless Foot Pices	Vacuum
		A60005	A60006	A66004
66004S	1/4-28	STD	X	X
66004SM6	M6 x 1	STD	X	X
66004SM8	M8 x 1	STD	X	X

Note: X=To be confirmed



Technical information (mm)

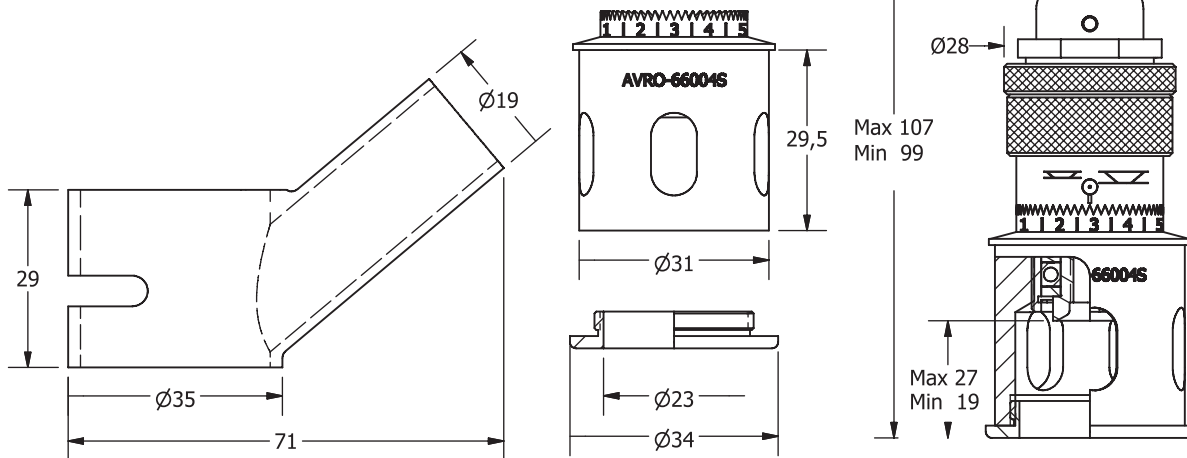

4175 boul. Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-866-874-9444
F: 514-336-0277 | 1-888-336-6055
info@avrotools.com