

Avro 66005


Avro Ball Bearing Microstop

- Spindle mounted on 4 ball bearings.
- Bearings protected by dust shields.
- Stainless steel bearing body.
- Stainless steel lock Nut left hand .
- .275" (7mm) Shank.
- 5/16" (8 mm) Shaft Travel.
- 3/4" (19.05mm) Cutter Capacity.
- 0.0005" (0.0127mm) Increment Depth Adjustment
- Rated at 10,000 RPM .

Model	Shaft
66005S	1/4-28
66005SM6	M6 x 1
66005SM8	M8 x 1



Technical information (mm)

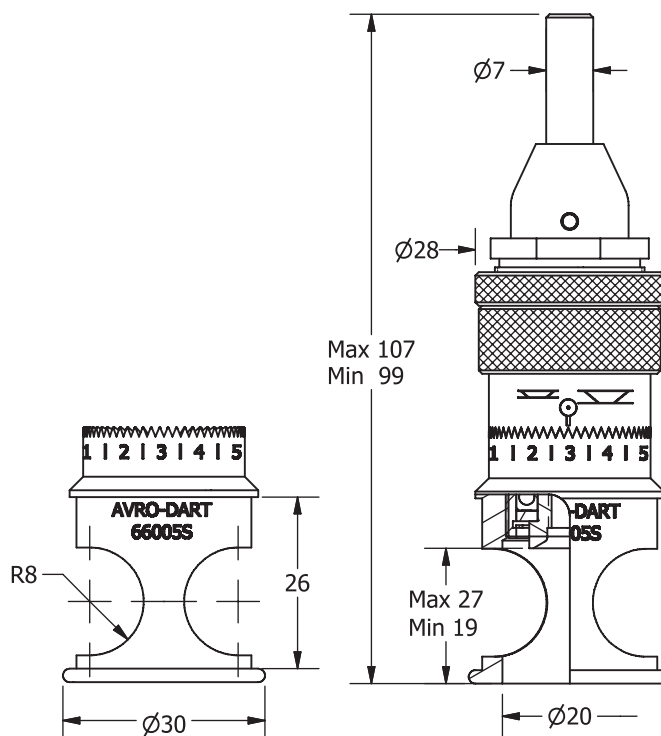

4175 boul. Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-866-874-9444
F: 514-336-0277 | 1-888-336-6055
info@avrotools.com

B

avrotools.com