

Avro 67000

Avro Ball Bearing Microstop




- Spindle mounted on 6 ball bearings.
- Stainless steel bearing body.
- Stainless steel lock Nut left hand .
- 1/4" (6.35mm) Shank.
- 1/4" (6.35 mm) Shaft Travel.
- 7/16" (11.11mm) Cutter Capacity.
- 0.0005" (0.0127mm) Increment Depth Adjustment
- Rated at 5,000 RPM .

Model	Shaft	No-Mar Foot Pices	stainless Foot Pices	Vacuum
		A60012D	A60012S	A66005
67000	1/4-28	STD	X	X
67000M6	M6 x 1	STD	X	X

NOTE: X=To be confirmed



Technical information (mm)

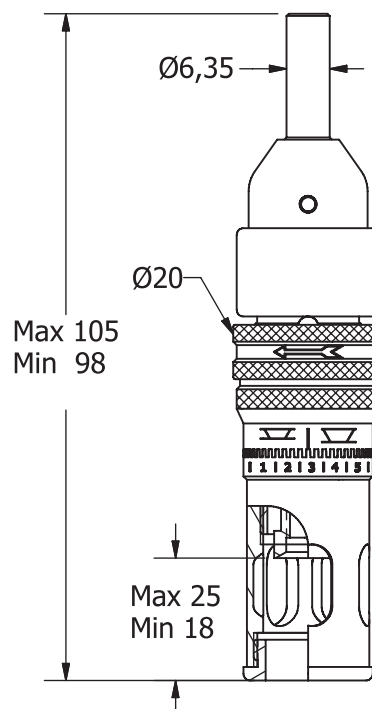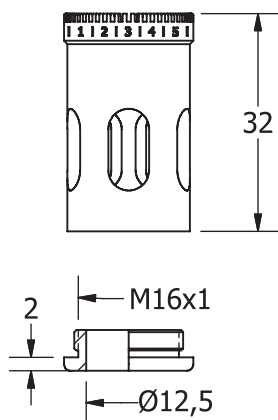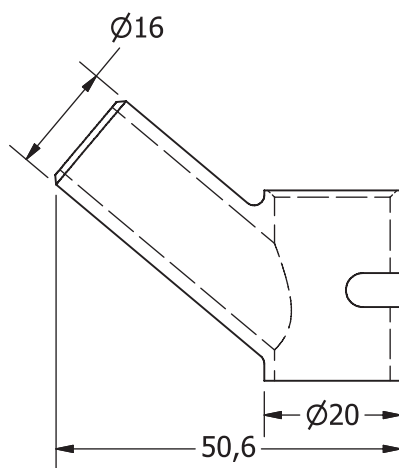

4175 boul. Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-866-874-9444
F: 514-336-0277 | 1-888-336-6055
info@avrotools.com

B

avrotools.com