

Avro 68023

Avro Ball Bearing Microstop

For Drilling Reaming and Countersinking


- Spindle mounted on 4 ball bearings.
- Spindle supported by needle bearing and trust bearing.
- Bearing protected by dust shield.
- Stainless Steel body.
- Stainless Steel Luck Nut left hand.
- Shank 6,35mm (1/4").
- Stroke 21mm (.826").
- Cutter capacity 22.225mm (7/8").
- Depth adjustment (1 scale division= .0005"; 0.0127mm)
- Rated at 10000 rpm

Model	Shaft	No-Mar Foot piece	Stainless Foot piece	Vacuum
		A60005	A60006	A66004
68023	1/4-28	STD	X	X
68023M6	M6 X 1	STD	X	X
68023M10	M10 X 1	STD	X	X

Note:X = To be confirmed



Technical informations (mm)

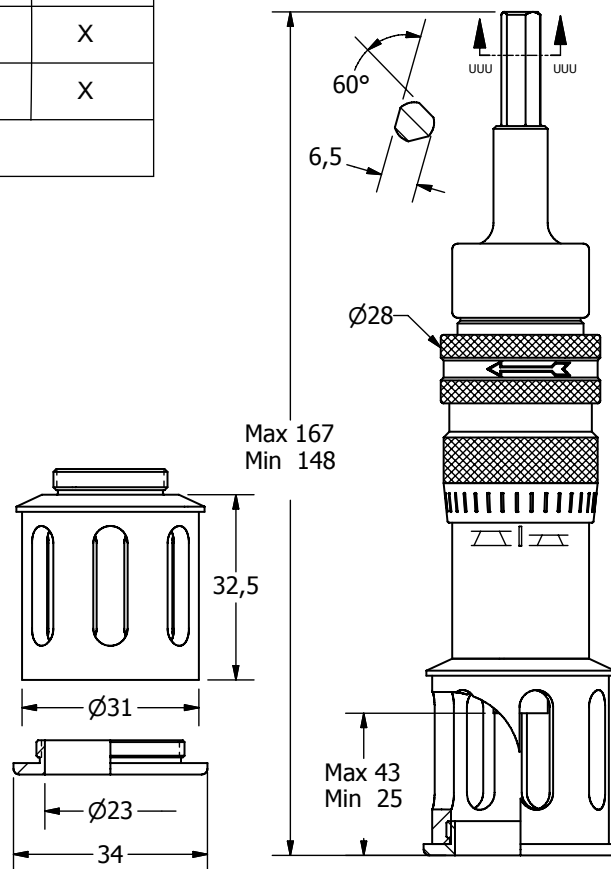

4175 BOUL,Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-886-874-9444
F: 514-336-0277 | 1-888-336-0544
info@avrotools.com

B

avrotools.com