


Avro Ball Bearing Microstop


- Spindle mounted on 2 ball bearings.
- Bearings protected by dust shields.
- Stainless steel bearing body.
- Stainless steel lock Nut left hand .
- 3/16" (4.76mm) Shank.
- 1/8" (3.17 mm) Shaft Travel.
- 9/16" (14 mm) Cutter Capacity.
- 0.0005" (0.0106mm) Increment Depth Adjustment
- Rated at 3,000 RPM .

Model	Shaft	No-Mar Foot Pices	stainless Foot Pices
69000	1/4-28	STD	A
69000M6	M6 x 1	STD	A

Add following suffix to model ex: 69000A A=Stainless F.P

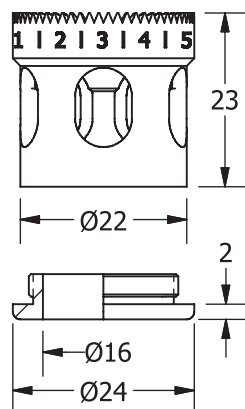

Technical information (mm)

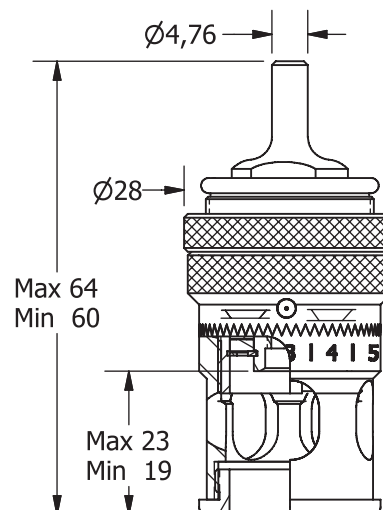

4175 boul. Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-866-874-9444
F: 514-336-0277 | 1-888-336-6055
info@avrotools.com