

## Flat Offset **Angle Drill** 90 Degree



### General:

- Air Inlet: 1/4" NPT Standard
- Air pressure 90 psi (620 KPA)

| Model | Speed | Spindle | Blade Length ( C )<br>inch / mm | Length    | Weight   |
|-------|-------|---------|---------------------------------|-----------|----------|
|       | Rpm   | Inch    |                                 | Inch / mm | Lbs / kg |

### Cf101 0.4 hp (300w) Rear Exhaust


|       |       |        |            |            |            |
|-------|-------|--------|------------|------------|------------|
| 12408 | 3,000 | 1/4-28 | 4.8 / 122  | 10.3 / 261 | 1.8 / 0.8  |
| 12409 | 3,000 | 1/4-28 | 6.14 / 156 | 11.3 / 296 | 2.0 / 0.9  |
| 12410 | 3,000 | 1/4-28 | 7.5 / 190  | 13.0 / 330 | 2.1 / 0.95 |

### Cf105 0.6 hp (450w) Rear Exhaust

|       |       |        |            |            |            |
|-------|-------|--------|------------|------------|------------|
| 12428 | 2,400 | 1/4-28 | 4.8 / 122  | 10.8 / 274 | 2.1 / 0.95 |
| 12429 | 2,400 | 1/4-28 | 6.14 / 156 | 12.1 / 308 | 2.3 / 1.04 |
| 12430 | 2,400 | 1/4-28 | 7.5 / 190  | 13.5 / 343 | 2.5 / 1.13 |

| A (in / mm) | B (in / mm) | C (in / mm) |
|-------------|-------------|-------------|
| 2.48 / 63   | 2.44 / 62   | 4.8 / 122   |
| 3.83 / 97   | 3.78 / 96   | 6.14 / 156  |
| 5.18 / 131  | 5.13 / 130  | 7.5 / 190   |

Standard Output 1/4-28  
Add Suffix to model ex:12408A  
A=9831-40

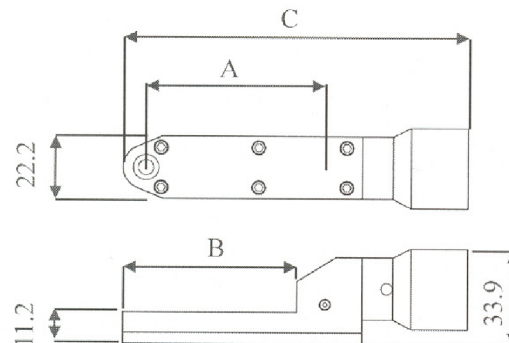

4175 boul. Poirier  
Montréal, Québec, Canada H4R 2G9  
T: 514-336-9444 | 1-866-874-9444  
F: 514-336-0277 | 1-888-336-6055  
info@avrotools.com