


Avro XT250PFC

Avro “Powerfeed Countersink”

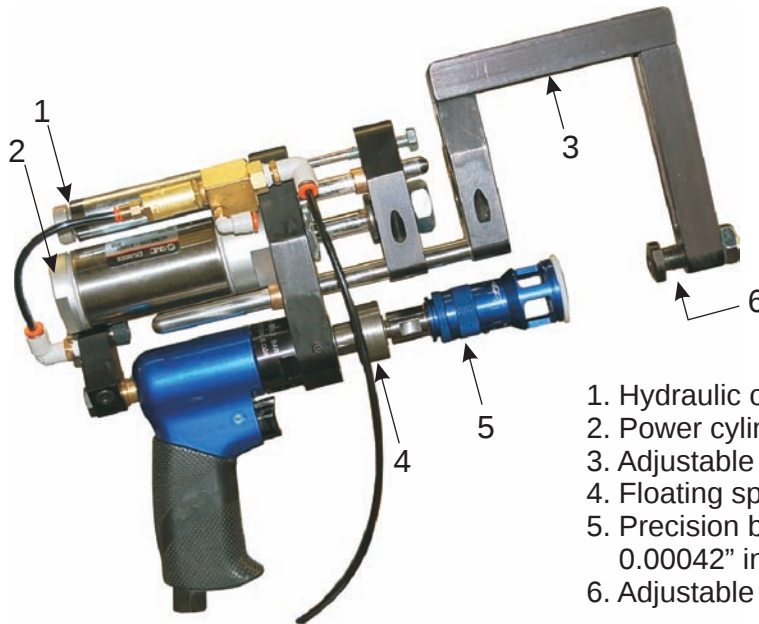

1. Hydraulic check unit for precise feed control
2. Power cylinder. 170 LB/Force @ 100PSIG
3. Adjustable yoke
4. Floating spindle adapter
5. Precision ball bearing microstop with 0.00042" increment adjustment
6. Adjustable foot for finite adjustment

High Performance “Ergo Fleet” Drill .5HP (0.37KW)

Model Number	Free Speed	Spindle Thread	Maximum Torque	Length	Weight
	Rpm	Inch	lb / Nm	Inch / mm	lbs / kg
15022PFC	5,000	3/8 -24	1.3 / 1.7	15.3 / 390	5.0 / 2.27
15023PFC	3,200	3/8 -24	2.5 / 3.4	15.3 / 390	5.0 / 2.27
15024PFC	2,400	3/8 -24	3.3 / 4.5	15.3 / 390	5.0 / 2.27
15025PFC	1,600	3/8 -24	4.2 / 5.7	15.3 / 390	5.0 / 2.27
15026PFC	1,000	3/8 -24	5.5 / 7.5	15.3 / 390	5.0 / 2.27
15027PFC	800	3/8 -24	5.8 / 7.8	15.3 / 390	5.0 / 2.27
15028PFC	500	3/8 -24	7.5 / 10.2	15.3 / 390	5.0 / 2.27

General:

- Air Inlet: 1/4" NPT Standard
- Use 5/16" (8mm) I.D Hose
- Air pressure 90 psi (620 KPA)



4175 boul. Poirier
Montréal, Québec, Canada H4R 2G9
T: 514-336-9444 | 1-866-874-9444
F: 514-336-0277 | 1-888-336-6055
info@avrotools.com



avrotools.com