




PRODUCT
PAGE

High pressure hoses

CUSTOM FLEX HOSES ON REQUEST

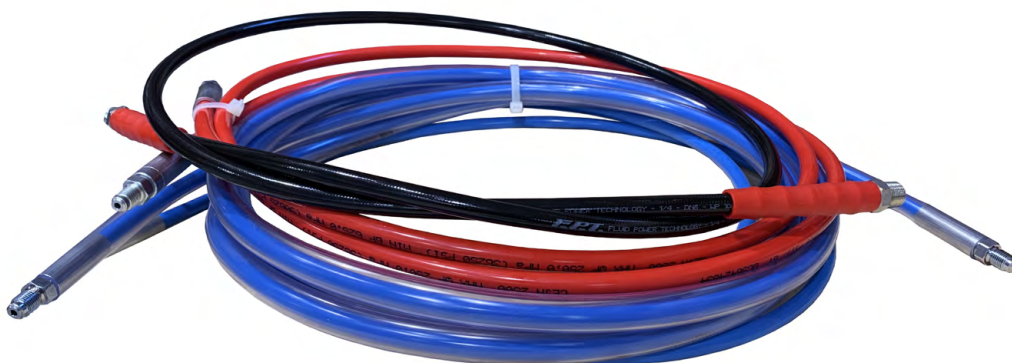

The 1000 bar thermoplastic flex hoses standard 1/4 version with internal Ø 6.3 mm are suitable for demanding applications and have a safety factor of 2.8: 1. On request, also available hoses with custom sizes and fittings, flexible hoses with internal Ø of 9.7 mm for applications with high flow rates as well.

For very high pressure applications, thermoplastic hoses available in a range from 1.800 to 4.000 bar to cover all market needs.

FLEX HOSES

Max working pressure
1.000 to 4.000 bar

MAX W.P.	1000 BAR							
LENGTH [m]	TFR #		TFRR #		TFG #		TFGG #	
	END 1	END 2	END 1	END 2	END 1	END 2	END 1	END 2
0,6	3/8" NPT		1/4" NPT		3/8" NPT	GR-6M		GR-6M
1								
2								
3								
4								
5								
6								
10								

MAX W.P.	1800 BAR		2500 BAR		3000 BAR		3000 BAR		4000 BAR		4000 BAR	
LENGTH [m]	TFR # / 1800		TFR # / 2500		TFR # / 3000-M16D		TFR # / 3000-M16G		TFR # / 4000-M16D		TFR # / 4000-M16H	
	END 1	END 2	END 1	END 2	END 1	END 2	END 1	END 2	END 1	END 2	END 1	END 2
1	1/4" GAS M - 120°		1/4" GAS M - 120°		M16x1,5		1/4" GAS F - 60°	M16x1,5	M16x1,5		1/4" HP	M16x1,5
1,5												
2												
3												
4												
5												
6												

insert length of the hose expressed in meters

