




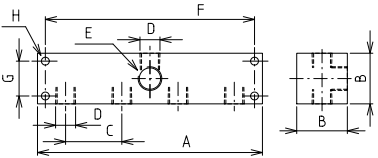
PRODUCT
PAGE


For quick and safe connection of
the hydraulic circuits

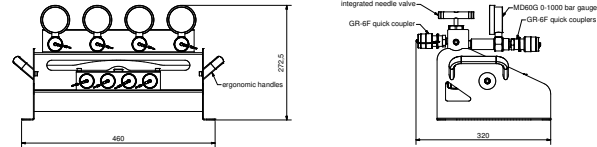
CUSTOM VALVES ON REQUEST



- Used to connect multiple lines to one inlet.
- Built with radial or linear outlet. The linear models are supplied with a pressure gauge installation hole.
- Available in 11 standard models and in custom versions for high pressure jobs.
- From 700 to 4.000 bar

	MODEL	NUMBER OF USES	MAX WORKING PRESSURE (bar)	DIMENSIONS (mm)								
				A	B	C	D	E	F	G	H	
	MR - 3V	3	700	70	26	3/8" NPT						
	MR - 5V	5		70	26	3/8" NPT						
	MR - 11V	11		148	35	3/8" NPT						
	MR - 17V	17		230	35	3/8" NPT						
	ML - 5	5	700	200	45	50	3/8" NPT	G 1/2"	186	31	6,5	
	ML - 7	7		300	45	50	3/8" NPT	G 1/2"	286	31	6,5	
	ML - 9	9		400	45	50	3/8" NPT	G 1/2"	386	31	6,5	
	ML - 11	11		500	45	50	3/8" NPT	G 1/2"	486	31	6,5	

	MODEL	NUMBER OF USES	MAX WORKING PRESSURE (bar)	DIMENSIONS (mm)
	VM5A/2	3	700	
	VM5A/4	5	700	

INTEGRATED MANIFOLD FOR DOUBLE ACTING	MODEL	NUMBER OF USES	MAX WORKING PRESSURE (bar)	MASS (KG)	DIMENSIONS (mm)							
	MI-4DE-M	4	700	19								
	MI-8DE-M	8		19+19	