



PRODUCT
PAGE



Light and portable

**CUSTOM HYDRAULIC PUMPS
ON REQUEST**




- Hydraulic mini pump, extremely light and compact, suitable for all applications where easy handling is a priority.
- **Only 12 kg weight to operate in any environment.**
- Maximum working pressure 700 bar.
- Single-phase electric motor 230V-50Hz, power 0.55 kW.
- Radial piston pump, double stage, suitable for heavy-duty applications.
- Available for simple and double acting applications.
- Electrically operated valves.
- Remote control as standard on all models.
- 2.1 liters resin tank.
- Metal cage with ergonomic handle.
- Available with pressure gauge and handwheel pressure regulator.
- GR-6F female quick coupling as standard on the outlets.


FPT-MPU

700 bar
Double stage
1/0,5 l/min oil flow
2,1 l oiltank capacity




G e PR options

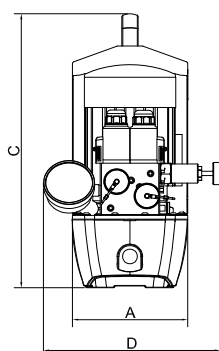

PR option

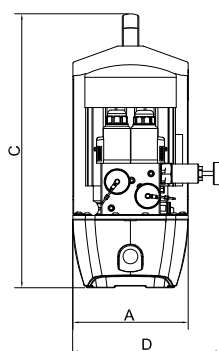

G option

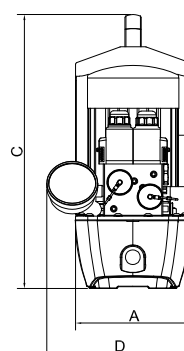

FPT-MPU

CODE	MODEL	PRESSURE 1°/2° STAGE	OIL FLOW	MOTOR	TENSION/ FREQUENCY	POWER/ RPM	TANK CAPACITY	DIMENSIONS mm				WEI- GHT
		bar	l/min					A	B	C	D	
31FPTMPU2SAS	FPT-MPU-2-SA-S	75/700	1/0,5	MONO PHASE ELECTRIC	230V-50Hz	0,55/2800	2,1	155	344	372	-	12
31FPTMPU2DAS	FPT-MPU-2-DA-S	75/700	1/0,5	MONO PHASE ELECTRIC	230V-50Hz	0,55/2800	2,1	155	344	372	-	12
31FPTMPU2SASG	FPT-MPU-2-SA-S-G	75/700	1/0,5	MONO PHASE ELECTRIC	230V-50Hz	0,55/2800	2,1	155	344	372	194	12
31FPTMPU2DASG	FPT-MPU-2-DA-S-G	75/700	1/0,5	MONO PHASE ELECTRIC	230V-50Hz	0,55/2800	2,1	155	344	372	194	12
31FPTMPU2SASPR	FPT-MPU-2-SA-S-PR	75/700	1/0,5	MONO PHASE ELECTRIC	230V-50Hz	0,55/2800	2,1	155	344	372	199	12
31FPTMPU2DASPR	FPT-MPU-2-DA- S-PR	75/700	1/0,5	MONO PHASE ELECTRIC	230V-50Hz	0,55/2800	2,1	155	344	372	199	12
31FPTMPU2SASGPR	FPT-MPU-2-SA-S- G-PR	75/700	1/0,5	MONO PHASE ELECTRIC	230V-50Hz	0,55/2800	2,1	155	344	372	238	12

OPTIONS

G	PRESSURE GAUGE
PR	PRESSURE REGULATOR
SA	FOR SINGLE ACTING CYLINDERS
DA	FOR DOUBLE ACTING CYLINDERS