

GB2620

GB2620A

HYDRAULIC
INSTALLATION TOOL

GAGE BILT

RIVET & LOCKBOLT TOOLS



44766 Centre Ct. Clinton Twp. MI 48038 USA

+1 586. 226.1500

+1 586. 226.1505

solutions@gagebilt.com

www.gagebilt.com

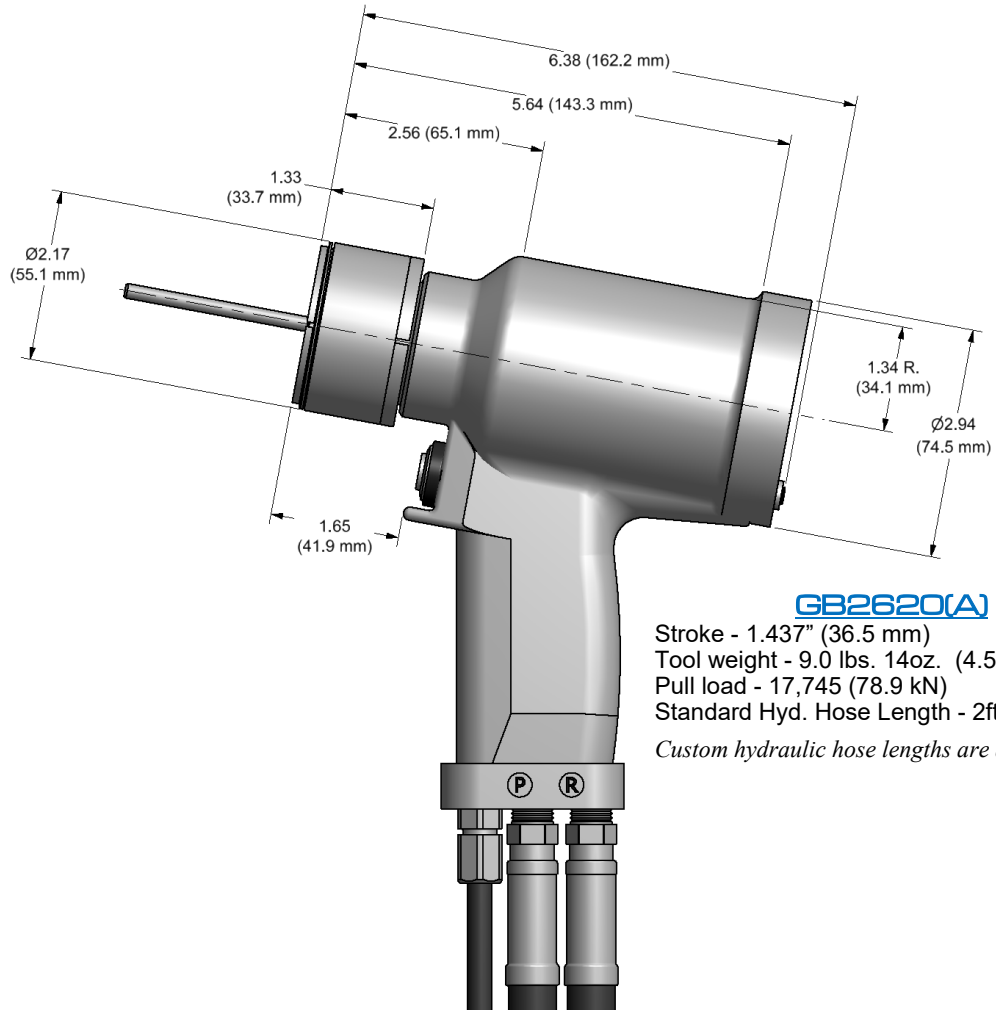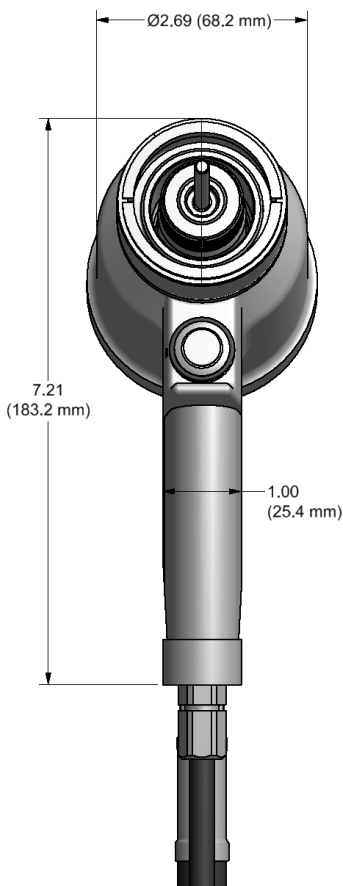

GB2620(A)

Stroke - 1.437" (36.5 mm)
Tool weight - 9.0 lbs. 14oz. (4.5kg)
Pull load - 17,745 (78.9 kN)
Standard Hyd. Hose Length - 2ft (.61 m)
Custom hydraulic hose lengths are available.

The **GB2620** and the **GB2620(A)** are hydraulic installation tools designed specifically for the efficient installation of 1/2" diameter lockbolts. It weighs just over 9lbs. 14 oz. (4.5 kg). and can be operated in any position. It has a 1.437" (36.5mm) fastener stroke and a rated pull load of 17,745 lbs. (78.9 kN) @ 6,500 psi. (448.2 bar).

The **GB2620** (Electric actuated) installation tool operates on hydraulic pressure developed by the **GB947** Powerunit set at 7,400 psi (510.2 bar) maximum PULL pressure and 3,200 psi. (220.6 bar) maximum RETURN pressure. The tool comes equipped with 2 feet (.61 m) of hydraulic hoses and couplings, electric switch and cord.

The **GB2620A** (Air actuated) installation tool operates on hydraulic pressure developed by the **GB910** & **GB912** Powerunits set at 7,400 psi (510.2 bar) maximum PULL pressure and 3,200 psi. (220.6 bar) maximum RETURN pressure. The tool comes equipped with 2 feet (.61 m) of hydraulic hoses, swivels and couplings, air actuator and tube.

**NOSE ASSEMBLIES ARE NOT FURNISHED WITH
TOOL AND MUST BE ORDERED SEPARATELY**





GB2620(A) ACCESSORIES

Approved for use on Gage Bilt CE installation tools and/or other manufacturer's CE approved tools of similar design.
(Sold Separately)




ACCESSORIES

(Sold Separately)

GB947 POWERUNIT



GB912 POWERUNIT

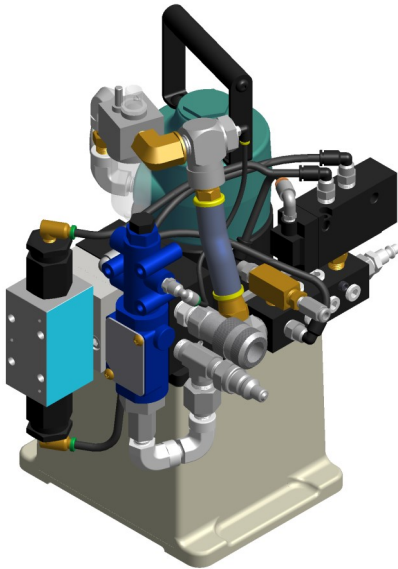


GB910 POWERUNIT



NOSE ASSEMBLY CHART

(Sold Separately)



FASTENER	DIA.	NOSE ASSEMBLY
LOCKBOLT HIGH TENSILE PULL TYPE C50L® LD AVDELOK®	1/2"	16-2620-41
BOM®	1/2"	BOM16-2620B-41
HP8	1/2"	CONTACT GAGE BILT FOR YOUR REQUIREMENTS
HP10.9	12mm	CONTACT GAGE BILT FOR YOUR REQUIREMENTS

C50L® AND BOM® ARE REGISTERED TRADEMARKS OF HOWMET AEROSPACE. AVDELOK® AND AVBOLT® ARE REGISTERED TRADEMARKS OF AVDEL UK LIMITED..


GAGE BILT CERTIFIES THE GB2620 WILL INSTALL THE ABOVE FASTENERS

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE ASSEMBLY EXTENDS FROM THE TOOL. (I.e. -41 = 4.1 inches)

REV 4/24

SUSPENSION BRACKET

(Sold Separately)

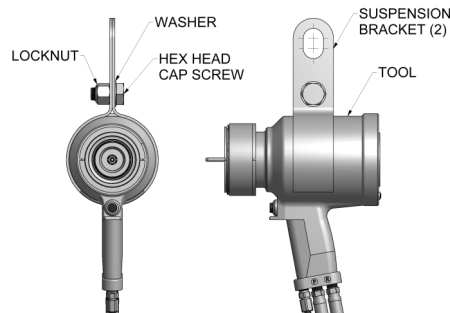

The use of suspension bracket Assy (A-1593) is strongly recommended as it increases ergonomic flexibility and reduces fatigue for users while installing fasteners.

Suspension Bracket Assy (A-1593) contains the bracket and hardware as shown in the figure.

RIVETER KITS

(Sold Separately)

Gage Bilt offers a wide selection of standard and custom kits tailored to your needs. Contact us for more information.



**CE
Approved**

12, 26, 38 & 52 FT HOSE LENGTHS AVAILABLE FOR ALL 3 POWERUNITS.
CUSTOM HOSE LENGTHS ALSO AVAILABLE.
CONTACT GAGE BILT FOR MORE INFORMATION.