

GB751

PNEUDRAULIC INSTALLATION TOOL SERIES

GAGE BILT

RIVET & LOCKBOLT TOOLS

44766 Centre Ct. Clinton Twp. MI 48038 USA

+1 586. 226.1500



+1 586. 226.1505

solutions@gagebilt.com

www.gagebilt.com

GB751

Stroke - .780" (19.8 mm)
Tool weight - 4.50 lbs. (2.04 kg)
Pull load - 2,200 (9.79 kN)

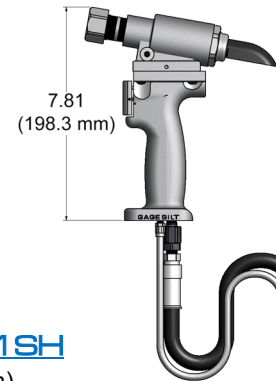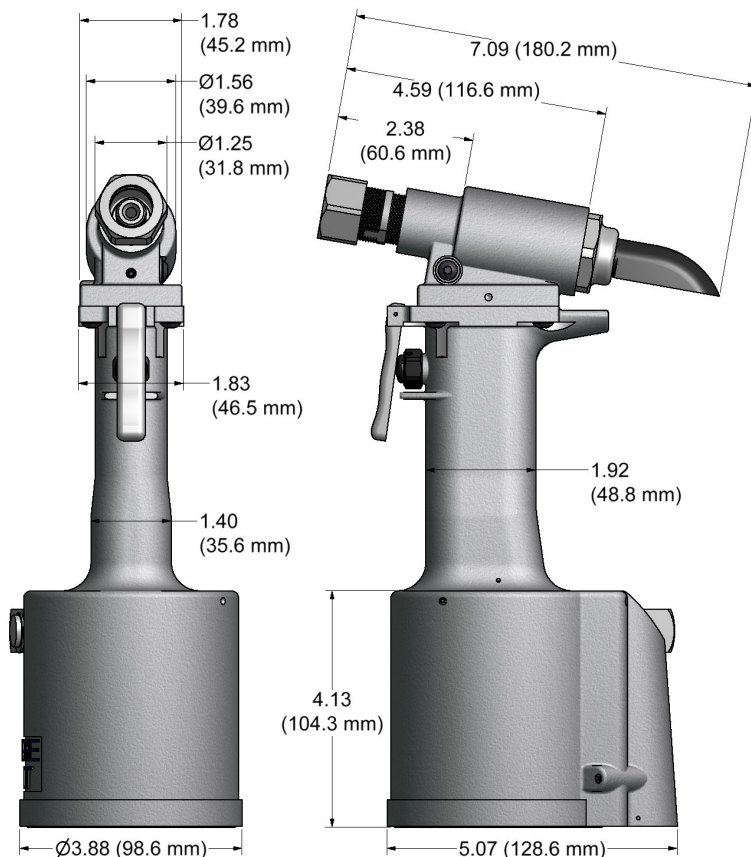

GB751SH

Stroke - .780" (19.8 mm)
Hand held weight - 2.25 lbs. (1.02 kg)
Entire tool weight - 7.25 lbs (3.29 kg)
Pull load - 2,200 (9.79 kN)
Standard Hyd. Hose Length - 8ft (2.4m)

*5ft Hyd. Hoses are recommended with use of Backpack
Additional custom lengths are available.*



GB751SR

Stroke - .780" (19.8 mm)
Hand held weight - 1.75 lbs. (.79 kg)
Entire tool weight - 6.75 lbs (3.06 kg)
Pull load - 2,200 (9.79 kN)
Standard Hyd. Hose Length - 3ft (.91m)

*5ft Hyd. Hoses are recommended with use of Backpack
Additional custom lengths are available.*

The **GB751** series are pneumatic-hydraulic installation tools, designed specifically for the efficient installation of blind rivets. They can be operated in any position and have a rated pull load of 2,200 (9.79 kN) pounds with 90 psi (6.2 bar) air pressure at the air inlet.

The **GB751SH** and **GB751SR** split handle installation tools offer a unique "split" system providing the operator with an ergonomic tool with reduced hand held weight. The **GB751SH** comes with 8 feet (2.4 m) of hose and the **GB751SR** comes with 3 feet (.91 m) of hose. Use with our "NEW" Split-System Backpacks to increase user mobility, ergonomics and productivity. Contact GAGE BILT for more information.

The **GB751** series tools operate on 90 to 100 psi. (6.2 - 6.9 bar) of air pressure, with 90 psi. (6.2 bar) providing the maximum efficiency. At 90 psi. (6.2 bar) of air pressure, the **GB751** series does not exceed 81.5 dB(A) and consumes .16 SCF/cycle (4.53 L/cycle) for the **GB751** and **GB751SR**. The **GB751SH** consumes .30 SCF/cycle (8.50 L/cycle). The air inlet is provided with 1/4 - 18 female pipe thread to accept the users air hose fitting.

**NOSE ASSEMBLIES ARE NOT FURNISHED WITH
TOOL AND MUST BE ORDERED SEPARATELY**





GB751 ACCESSORIES

Approved for use on Gage Bilt CE installation tools and/or other manufacturer's CE approved tools of similar design.
(Sold Separately)



ACCESSORIES

(Sold Separately)

Catcher Bag-Stem
#704214 (Light Duty)
(Sold Separately)



Air Bleeder Assy
#704153
(Sold Separately)



Riveter Kits

Gage Bilt offers a wide selection of standard and custom kits tailored to your needs. Contact us for more information.
(Sold Separately)



CE
Approved

Grip Gage #269G3


For CHERRYMAX®, "A" Code,
NAS 1900 series and CHERRYLOCK® rivets
(Sold Separately)



Adapter Assembly #713206



No stroke limiter required.

Adapts all "OSSG" offset series nose assemblies to GB751 installation tool.
(Sold Separately)



Adapter Assembly #751206-1

Required to adapt all "OSSG" nose assemblies to the GB751 installation tool.
No stroke limiter required.
(Sold Separately)



Gage Bilt also supplies pin & collar swage inspection gages to certify swage installation.
(Sold Separately)

XX-25OSSG, XX-30OSSG, XX-34OSSG Offset Nose Assemblies are supplied with a one-piece Super Grip Jaw Assembly for dry applications.

For wet applications where sealant is used, XX-25OS, XX-30OS, XX-34OS Offset Nose Assemblies may be ordered. The "OS" designates that the Offset Nose Assembly will come with loose Jaws, Follower, Spring and Locator for easier cleaning.

Please note **this only applies to cartridge style Offset Noses** listed on chart above.

NOSE ASSEMBLY CHART

(Sold Separately)

STRAIGHT
(Sold Separately)



RIGHT ANGLE
(Sold Separately)



OFFSET
(Sold Separately)



FASTENER	DIA.	STRAIGHT		RIGHT ANGLE	OFFSET
MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXIBOLT®, BACB30YY, YU, & YT CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER	1/8 5/32	SB04-752C-20 SB04-752C-80	SB04-752C-45	SB04-751C-54RA	SB04-752B-43OS SB05-752A-43OS
MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXIBOLT®, BACB30YY, YU, & YT CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH DRIVE WASHER	1/8 5/32	UBB04-752C-20 UBB04-752C-80	UBB04-752C-45	UBB04-751C-54RA	UBB04-752B-43OS UBB05-752B-43OS
EN6122 & UAB130-EU EN6127 & UAB6127-EU EN6128 & UAB100-EU EN6129 & UABP-EU MAXIBOLT® PLUS	 5/32	 UAB05-752C-20	 UAB05-752C-45	 UAB05-751C-54RA	 UAB05-752B-43OS
NAS1900 S & U SERIES UNIMATIC® BLIND RIVET (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER	1/8 5/32 3/16 1/4	SMLS04-752C-20 SMLS05-752C-20 SMLS06-752B-20 SMLS08-713-20	SMLS04-752C-45 SMLS05-752C-45 SMLS06-752B-45 SMLS08-713-45	SMLS04-751C-54RA SMLS05-751C-54RA SMLS06-751C-54RA SMLS08-713B-58RA	SMLS04-752B-43OS SMLS05-752B-43OS SMLS06-752B-43OS SMLS08-752B-43OS
NAS1900 S & U SERIES UNIMATIC® BLIND RIVET (SINGLE ACTION) WITH DRIVE WASHER	1/8 5/32 3/16 1/4	456UBR-751A-21 456UBR-751A-61 UBR08-713-20	456UBR-751A-61 UBR08-713-45	456UBR-751D-54RA UBR08-713B-58RA	456MAX-731-43OS UBR08-27OSSG UBR08-37OSSG
"A" CODE NAS1398A, NAS1399A NAS1738A, NAS1739A	3/32 1/8 5/32 3/16	3A-352B-25 4A-752C-20 5A-752C-20 6A-752B-20	3A-752C-45 4A-752C-45 5A-752C-45 6A-752B-45	3A-751C-54RA 4A-751C-54RA 5A-751C-54RA 6A-751C-54RA	3A-752B-43OS 4A-752B-43OS 5A-752B-43OS 6A-752B-43OS
NUT PLATE RIVETS MS20600 SERIES COR244/264/274 MS9SPFT BACR150C/DA/DR	3/32 1/8	3NP-751-23 5N-751-23	3NP-352-61 5N-352-61	3NP-751B-54RA 45N-751B-54RA	3NP-751A-43OS 5N-751A-43OS
CHERRYMAX®, CHERRYMAX® "AB", MBO® LOCK CREATOR BACR15FRFP, BACR15GF/GK	1/8 5/32 3/16	456MAX-751-23	456MAX-751A-61	456MAX-751D-54RA	456MAX-731-43OS
ASP® ASP 2, ASP PF, ASP 2 F, ASP 2 LC, ASP 4 FF, ASP FF, ASP F, ASP-LC and MAF	13/64	ASP06-752C-20	ASP06-752C-45	ASP06-751B-54RA	ASP06-752B-43OS
STANDARD MBO® NAS1719, NAS1720 NAS1721	1/8 5/32 3/16	MBC04-752C-20 MBC05-752C-20 MBC06-752B-20	MBC04-752C-45 MBC05-752C-45 MBC06-752B-45	MBC04-751C-54RA MBC05-751C-54RA MBC06-751C-54RA	MBC04-752C-43OS MBC05-752C-43OS MBC06-752C-43OS
MBO® LOCKCREATOR NAS1719X(L), NAS1720X(L) NAS1721X(L)	1/8 5/32 3/16	456MAX-751-23	456MAX-751A-61	456MAX-751D-54RA	456MAX-731-43OS
GROUND STUD, M83454 & BACS53B	8/32 10/32	GS8-752C-20 GS10-752B-20	GS8-752C-45 GS10-752B-45	GS8-751C-54RA GS10-752A-54RA	GS8-752B-43OS GS10-752C-43OS
POP® OPEN END NAIL RIVET	3/32 1/8 5/32 3/16	3N-751-23 4N-751-23 5N-751-23 6N-751-23	3N-352-61 4N-352-61 5N-352-61 6N-352-61	3N-751B-54RA 45N-751B-54RA 45N-751B-54RA 6N-751C-54RA	3N-751A-43OS 4N-751A-43OS 5N-751A-43OS 6N-751A-43OS
POP® CLOSED END NAIL RIVET (ALUMINUM MANDREL)	3/32 1/8 5/32 3/16	3N-751-23 4CEA-751-23 5CEA-751-23 6CEA-751-23	3N-352-61 4CEA-352-61 5CEA-352-61 6CEA-352-61	3N-751B-54RA 4CEA-751B-54RA 5CEA-751B-54RA 6CEA-751C-54RA	3N-751A-43OS 4CEA-751-43OS 5CEA-751-43OS 6CEA-751-43OS
POP® CLOSED END NAIL RIVET (STEEL MANDREL)	3/32 1/8 5/32 3/16	3N-751-23 4CES-751-23 5CES-751-23 6CES-751-23	3N-352-61 4CES-352-61 5CES-352-61 6CES-352-61	3N-751B-54RA 4CES-751B-54RA 5CES-751B-54RA 6CES-751C-54RA	3N-751A-43OS 4CES-751-43OS 5CES-751-43OS 6CES-751-43OS
FASTACK® AF5022 AF5055 S149A020	1/8 5/32 3/16	4C-752C-20 5C-752C-20 6C-752B-20	4C-752C-45 5C-752C-45 6C-752B-45	4C-751C-54RA 5C-751C-54RA 6C-751C-54RA	4C-751A-43OS 5C-751A-43OS 6C-751A-43OS
SUPERTACK® AF5075 AF5076	1/8 5/32 3/16 1/4	3A-352B-25 4A-752C-20 5A-752C-20 6A-752B-20	3A-752C-45 4A-752C-45 5A-752C-45 6A-752B-45	3A-751C-54RA 4A-751C-54RA 5A-751C-54RA 6A-751C-54RA	3A-752B-43OS 4A-752B-43OS 5A-752B-43OS 6A-752B-43OS

UNIMATIC® and ASP® are REGISTERED TRADEMARKS OF HOWMET AEROSPACE. CHERRYMAX®, MAXIBOLT®, and MBO® are REGISTERED TRADEMARKS OF CHERRY AEROSPACE. FASTACK® and SUPERTACK® are REGISTERED TRADEMARKS OF ALLFAST FASTENING SYSTEMS INC. POP® is a REGISTERED TRADEMARK OF EMHART TECHNOLOGIES.

GAGE BILT CERTIFIES THE GB751 WILL INSTALL THE ABOVE FASTENERS

1) RIGHT ANGLE NOSE ASSEMBLIES MAY REQUIRE MORE THAN ONE PULL.
2) INSTALLS 1/8", 5/32" & 3/16" DIAMETERS.
3) ALUMINUM ONLY.
4) BACS53B -10 ONLY
5) THESE NOSES FOR LIGHT DUTY / REPAIR ONLY. CONSULT GAGE BILT FOR HIGH PRODUCTION APPLICATIONS.
6) ALL "OSSG" NOSE ASSEMBLIES REQUIRE THE 713206 ADAPTER. (NO STROKE LIMITER REQUIRED). OPTIONAL 751206-1 ADAPTER (NO STROKE LIMITER REQUIRED).

NOTE: THE LAST 2 DIGITS OF THE NOSE ASSEMBLY REPRESENTS THE LENGTH THE NOSE EXTENDS FROM THE TOOL. I.E. -20 = 2.0 INCHES

Rev. 9/25