



NOSE ASSEMBLY DATA SHEET

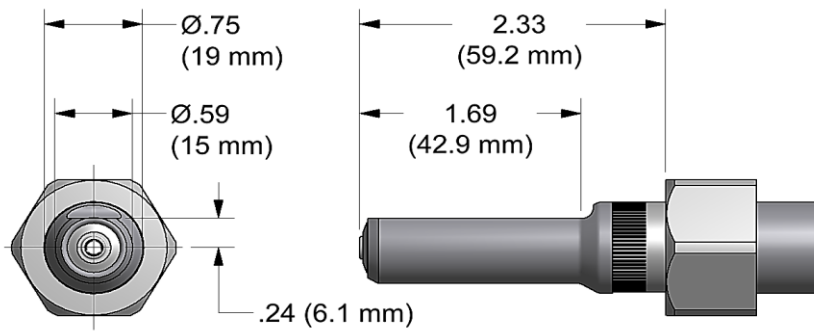

Use Hex-Key in rear of piston for Nose Assembly attachment.

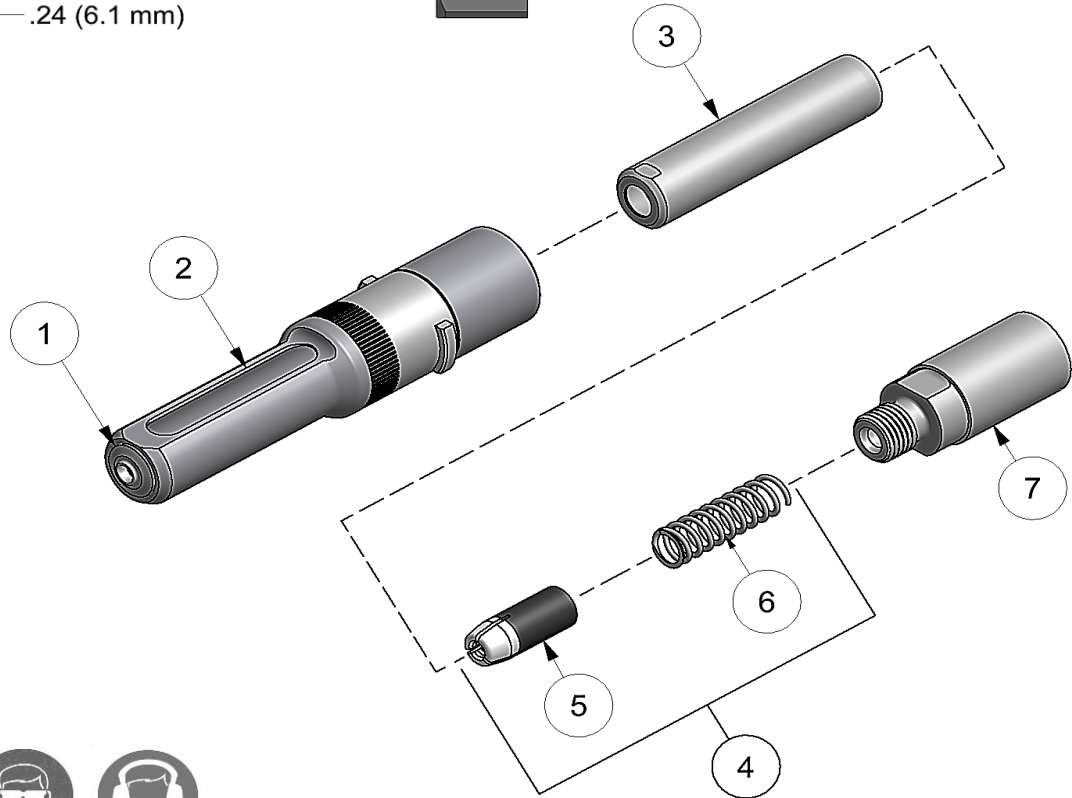

*Nose assy recommended for aluminum fasteners only.

1/15 REV 4/15

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp., MI 48038 (586) 226-1505 Fax
e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: GB751
Non Self-Releasing *3/16" Ø		*BLIND RIVET (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER NAS1900 S & U SERIES ALUMINUM ONLY	Alternate Tools: GB752, GB722 & GB2480
Ref. No.	Qty.	Description	*SMLS06-352B-25
1	1	Anvil-Driving	16023
2	1	Anvil & Holder Assy	10708
3	1	Collet	20502
4	1	Jaw Assy (Inc. 5 & 6)	30633-A2
5	1	Jaw Assy	30633-CS
6	1	Spring	50517
7	1	Collet Extension	70501