


NOSE ASSEMBLY DATA SHEET

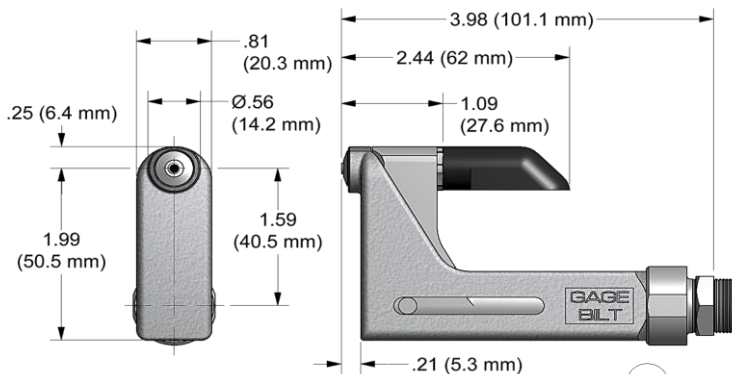


CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70411)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

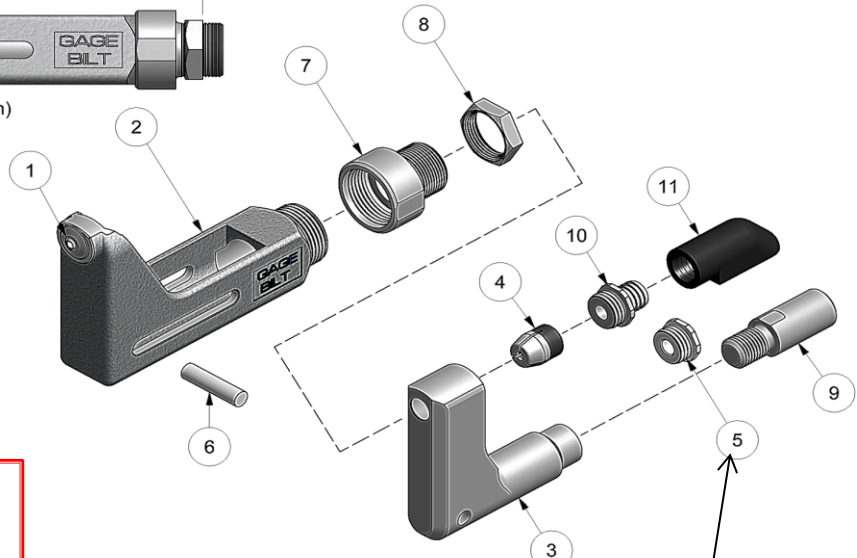

Cap (5) is used for closed access applications only or when clearance is an issue.

*GB715 will pull 5/32 & 3/16 fasteners in aluminum only.

**Requires 730715 adapter

***SMLS08-715B-400S is designed for aluminum fasteners only.

11/17 REV 10/25

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:		
Non Self-Releasing 1/8", 5/32", 3/16" & 1/4" Ø		NAS1900 S & U SERIES UNIMATIC® BLIND RIVET (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER		*GB715		
				Alternate Tools: **GB751		
Ref. No.	Qty.	Description	SMLS04-715B-400S	*SMLS05-715B-400S	*SMLS06-715B-400S	***SMLS08-715B-400S
1	1	Nose Tip	10485	15596	16023	10868
2	1	Anvil Holder Assembly	13014	13015	13016	13017
3	1	Collet	20911	20911	20911	20911
4	1	Super-Grip Jaw Assembly	30425-S2	30545-S4	30656-S3	30864-S16
5	1	Cap	60428	60428	60428	60428
6	1	Pin	70468	70468	70468	70468
7	1	Anvil Adapter	70346	70346	70346	70346
8	1	Jam Nut	70411	70411	70411	70411
9	1	Collet Adapter	70340	70340	70340	70340
10	1	Barbed Retainer	60440	60440	60440	60440
11	1	Deflector	61107	61107	61107	61107