

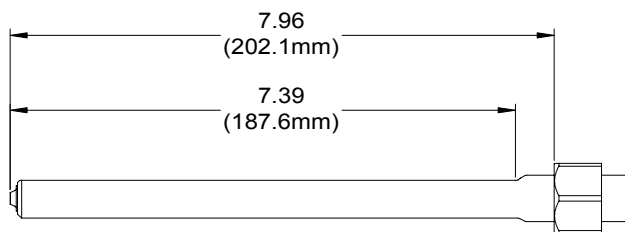


NOSE ASSEMBLY DATA SHEET



Use Hex-Key in rear of piston for Nose Assembly attachment.

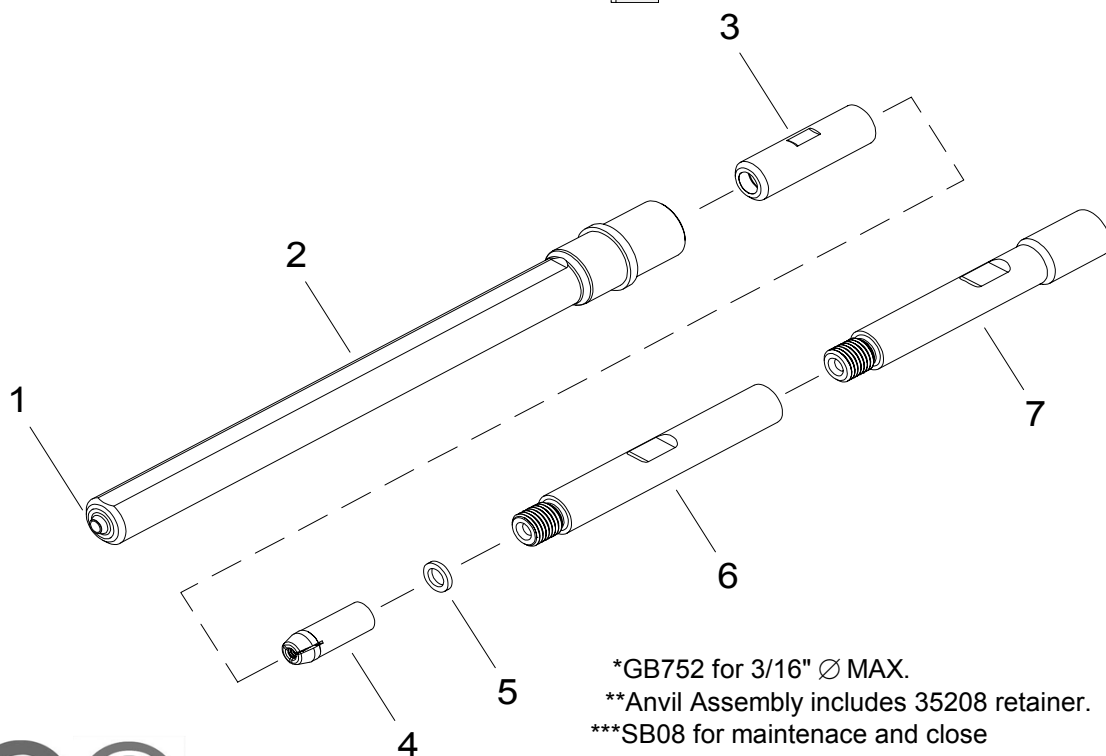

*GB752 for 3/16" Ø MAX.

**Anvil Assembly includes 35208 retainer.

***SB08 for maintenance and close clearance applications.

1/12



GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp., MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: *GB752	
Non Self-Releasing 5/32", 3/16" & 1/4" Ø		BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U CR7000 SERIES, BACB30YY, YU, & YT		Alternate Tools: GB713 & GB2480(A)	
Ref. No.	Qty.	Description	SB05-752C-80F	SB06-752C-80F	***SB08-752C-80F
1	1	Anvil-Driving	10562	10683	10867
2	1	Anvil & Holder Assembly	13319-1	13320-1	13321-1
3	1	Collet	20727	20727	20727
4	1	Super-Grip Jaw Assembly	30545-CS	30655-CS	30863-CS
5	1	Spacer	70572	70572	70572
6	1	Collet Extension	70461	70461	70461-1
7	1	Collet Extension	70551	70551	70551-1