



NOSE ASSEMBLY DATA SHEET

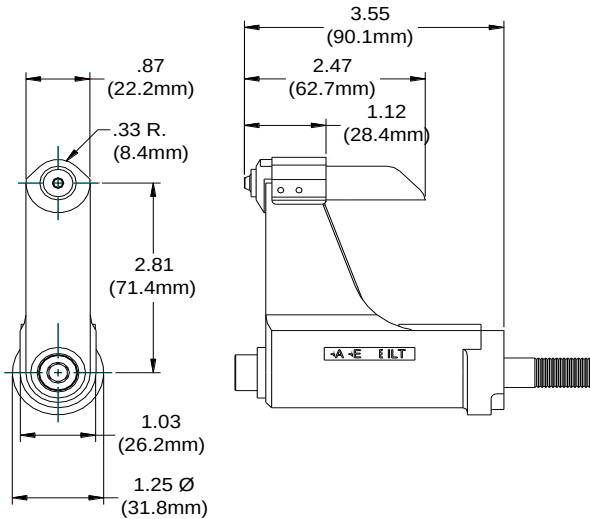

CAUTION:
Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (9) use for closed access applications only or when clearance is an issue!

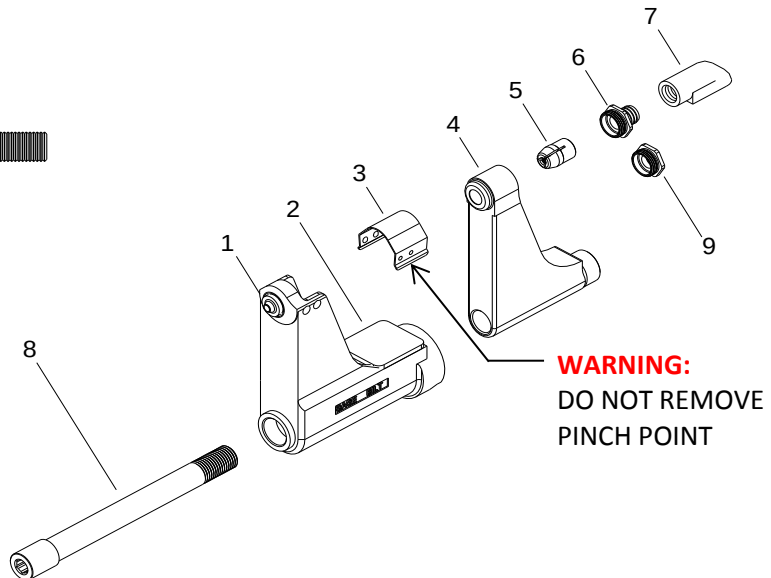

WARNING:
DO NOT REMOVE PINCH POINT

ASSEMBLY INSTRUCTIONS:

Disconnect tool from power source. On front of GB206-375(A) Installation tool, remove screw and stop. With collet placed in anvil install on tool. Apply Vibra-TITE® part no. 405124 to threads on drawbar. Slide drawbar thru anvil and collet. Using a 1/4" hex wrench, screw drawbar into piston until tight. Replace screw and stop on tool.

12/13



*Use Adapter No. 751206.

**Use Adapter No. 353206.

***Use Adapter No. 751206 with 713152 stroke limiter.

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:	
Non Self-Releasing 5/32", 3/16" & 1/4" Ø		MS90353S & U & MS90354S & U MS21140S & U & MS21141S & U "U" TYPE BLIND BOLT WITH DRIVE WASHER		GB206-375(A)	
				Alternate Tools: *GB752, **GB745 & ***GB713	
Ref. No.	Qty.	Description	SB05-206A-350S	SB06-206A-350S	SB08-206A-350S
1	1	Anvil Insert	10562	10683	10867
2	1	Anvil & Holder Assembly	12328	12329	12330
3	1	Guard	60426	60426	60426
4	1	Collet	20720	20720	20720
5	1	Super-Grip Jaw Assembly	30544-S2	30655-S8	30863-S4
6	1	Barbed Retainer	70569	70569	70569
7	1	Deflector	61107	61107	61107
8	1	Drawbar	71134	71134	71134
9	1	Cap	70571	70571	70571