


NOSE ASSEMBLY DATA SHEET

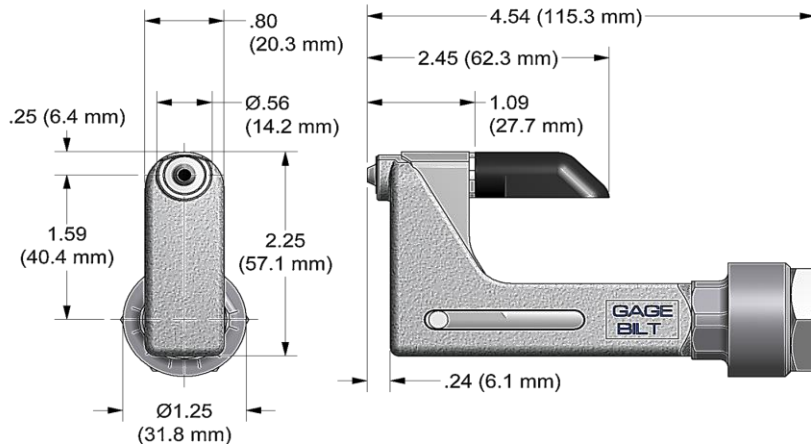


CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment :

Screw jam nut (70336) on nose fitting of tool at least 3/4". Screw nose assembly onto nose fitting of tool until it stops, then back off until nose is in desired position. (Warning: Do not back off nose assembly more than one complete turn). Lock jam nut (70336) against anvil & holder assy (13399).

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

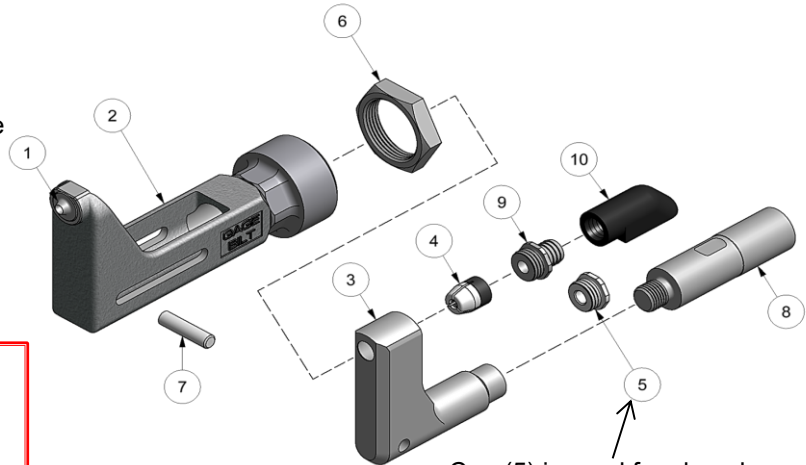

Cap (5) is used for closed access applications only or when clearance is an issue.



REV 10/25

*USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 5/32" Ø		MS90353S & U / MS90354S & U MS21140S & U / MS21141S & U MAXIBOLT®, BACB30YY, YU, & YT CR7000 SERIES BLIND BOLT (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER	GB751 Alternate Tools: GB713, GB722, GB2480(A), *GB745 & GB752
Ref. No.	Qty.	Description	SB05-752A-430S
1	1	Anvil-Driving	15597
2	1	Anvil & Holder Assembly (Inc. #1)	13399
3	1	Collet	20911
4	1	Super-Grip Jaw Assembly	30544-S3
5	1	Cap	60428
6	1	Jam Nut	70336
7	1	Roll Pin	70468
8	1	Collet Adapter	70332
9	1	Barbed Retainer	60440
10	1	Deflector	61107

MAXIBOLT® IS A REGISTERED TRADEMARK OF CHERRY AEROSPACE FASTENERS.