



NOSE ASSEMBLY DATA SHEET

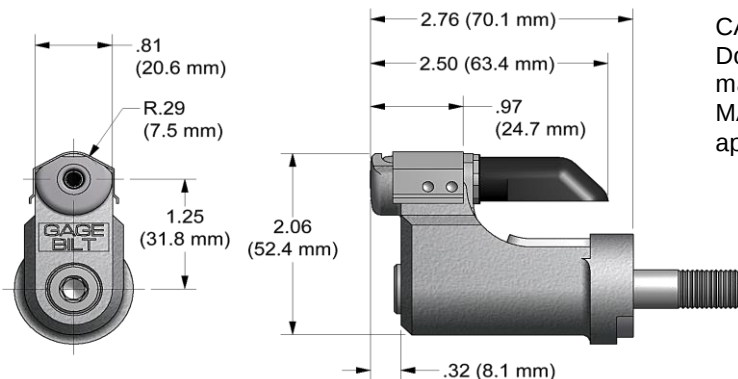

CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT. Cap (8) use for closed access applications only or when clearance is an issue!

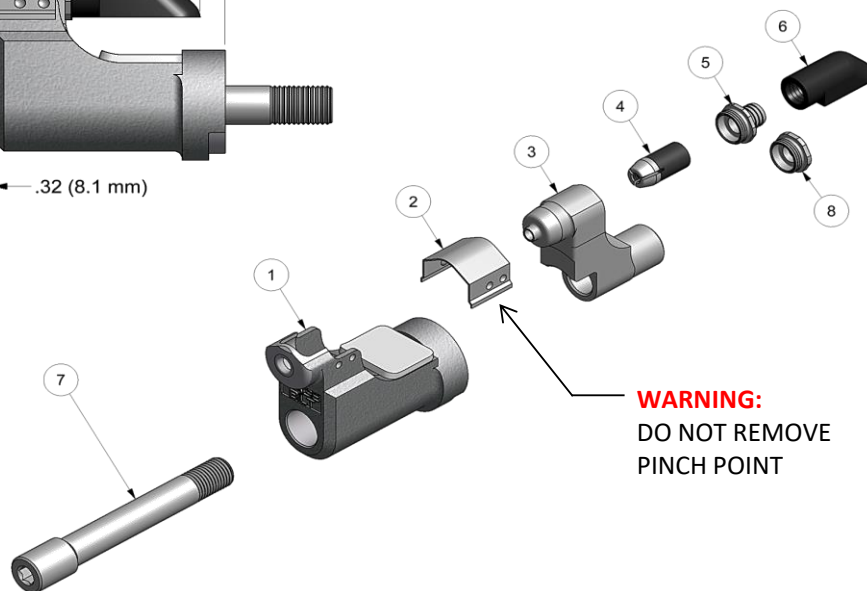

WARNING:

DO NOT REMOVE PINCH POINT

ATTACHING NOSE ASSEMBLY TO TOOL:

1. Cycle tool to ensure piston is full forward.
2. Disconnect tool from power source.
3. Remove screw and stop from tool.
4. Apply Vibra-TITE® part no. 405124 to threads on drawbar.
5. With nose assembly complete assembled, hold collet full forward in anvil and thread drawbar into piston.
6. In approximately 2-3 turns, the anvil assy threads will also engage onto tool, continue to thread drawbar and anvil completely on tool.
7. Back-off assy, no more than 1/2 turn, to position notch on anvil allowing screw and stop to be reassembled onto tool.

NOTE:

Yellow designates nose assy's for lightweight GP® fasteners.

7/15 REV 12/23



*Use Adapter No. 751206.

**Use Adapter No. 353206.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: GB206-500(A)
Non Self-Releasing 5/32" Ø		Lightweight GP® Lockbolts	Alternate Tools: *GB731 & **GB745
Ref. No.	Qty.	Description	LGP05-206G-30OSC
1	1	Anvil Assembly	15537-1
2	1	Guard	60436
3	1	Collet	20576-2
4	1	Super-Grip Jaw Assembly	30543-S8
5	1	Cap	70569-1
6	1	Deflector	61107
7	1	Drawbar	71141
8	1	Cap	70571-1