


NOSE ASSEMBLY DATA SHEET

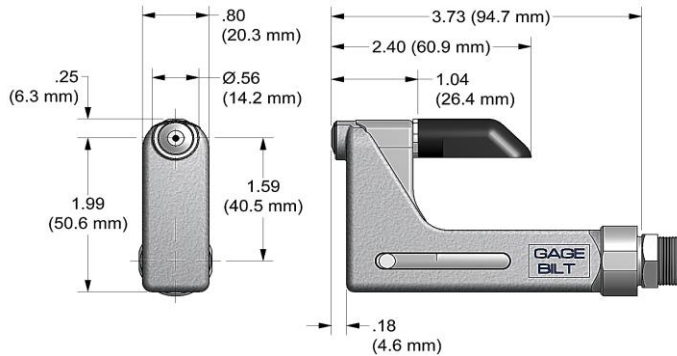


CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70411) against adapter (70341)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

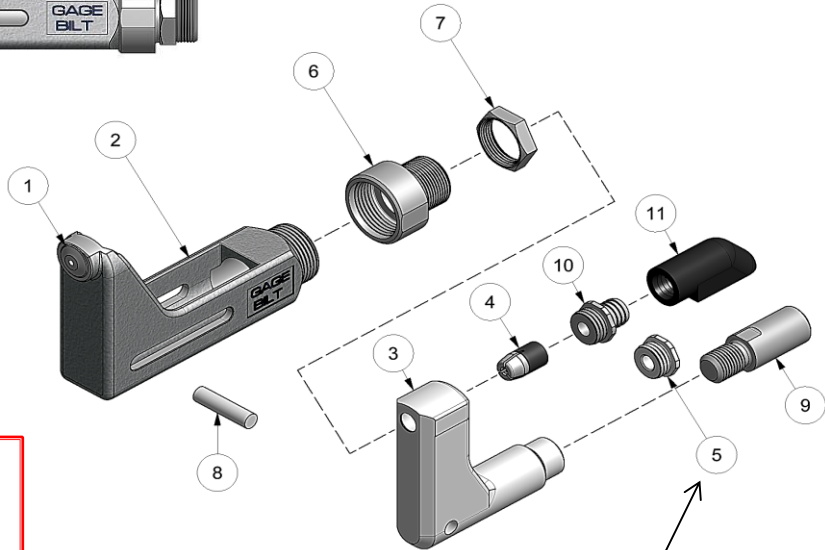

Cap (5) is used for closed access applications only or when clearance is an issue.

3/07 REV. 4/15

GAGE BILT

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 3/32" Ø		MS20600, Cherry® 9000 Huck® PT, SP & MS RV200 & RV500	GB715
			Alternate Tools: GB51
Ref. No.	Qty.	Description	3C-715-400S
1	1	Anvil Insert	13002
2	1	Anvil & Holder Assy (Inc. #1)	13373
3	1	Collet	20914
4	1	Super-Grip Jaw Assy	30314-S2
5	1	Cap	60428
6	1	Anvil Adapter	70341
7	1	Jam Nut	70411
8	1	Pin	70468
9	1	Collet Adapter	70340
10	1	Barbed Retainer	60440
11	1	Deflector	61107

CHERRY® IS A REGISTERED TRADEMARK OF CHERRY AEROSPACE FASTENERS. HUCK® IS A REGISTERED TRADEMARK OF ALCOA INC.