
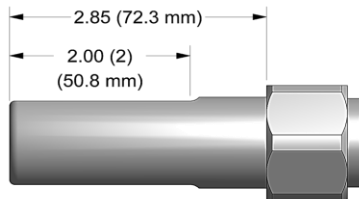


NOSE ASSEMBLY DATA SHEET

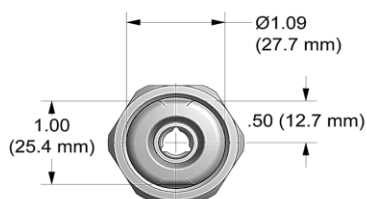


ASSEMBLY:

Notes:

- Apply Vibra-tite® p/n 405125 to all threads and allow it to set 20 minutes prior to assembly.
- Tighten extension-collet (4) to piston on tool to 80 - 100 IN-LBS. (.36 - .44 Kn) torque.
- If nose assy is assembled as it is when purchased new, follow steps 3-5 to attach to tool.
 - Insert super grip jaw assy (3) into rear of collet (2).
 - Thread collet (2) to extension-collet (4) using flats provided on collet-extension (4) and on collet (2).
 - Thread assembled collet (2) and extension-collet (4) onto piston of tool using flats provided and hex on rear of piston.
 - Slide anvil assembly (1) over collet (2).
 - Slide nut over rib on anvil (see exploded view) and tighten to tool.

DISASSEMBLY:

Reverse assembly instructions.

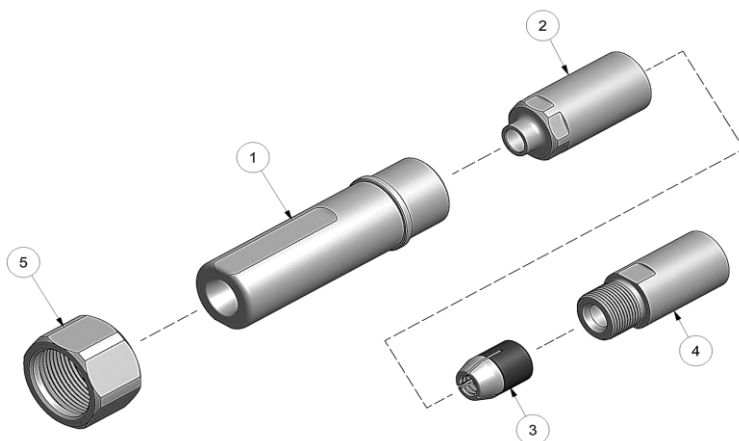

4/06 REV 9/25



GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB756	
Single Action 5/16 & 3/8 Ø		MAGNA-GRIP®, MULTI-GRIP, MAXLOK® LOCKBOLTS		Alternate Tools: GB2581(A)	
Ref. No.	Qty.	Description		MG10-756-28	MG12-756-28
1	1	Anvil		11051	11250
2	1	Collet		21040	21244
3	1	Super-Grip Jaw Assembly		31027-S	31227-S
4	1	Extension-Collet		71219	71219
5	1	Nut		71250	71250

MAGNA-GRIP® IS A REGISTERED TRADEMARK OF HOWMET AEROSPACE. MAXLOK® IS A REGISTERED TRADEMARK OF AVDEL UK LIMITED. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.