


NOSE ASSEMBLY DATA SHEET

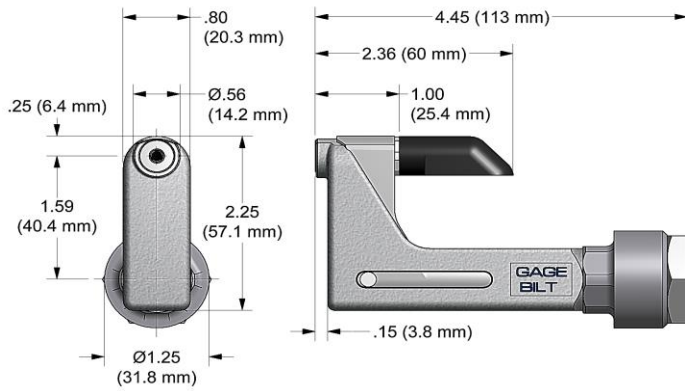


CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70331)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

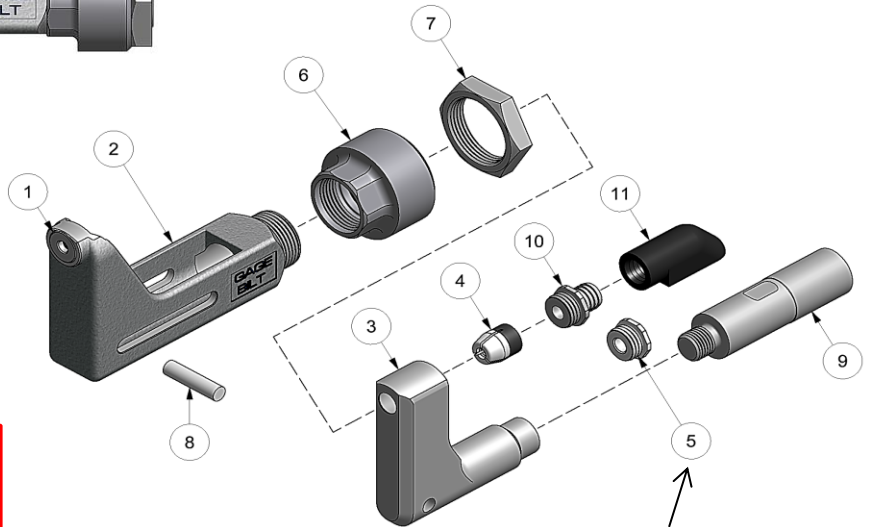

Cap (5) is used for closed access applications only or when clearance is an issue.



Rev. 4/15

*USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:
Non Self-Releasing 5/32" & 3/16" Ø		EN6122 & UAB130-EU / EN6127 & UAB6127-EU EN6128 & UAB100-EU / EN6129 & UABP-EU		GB752
Ref. No.	Qty.	Description	UAB05-752A-43OS	UAB06-752A-43OS
1	1	Anvil-Driving	15598	16026
2	1	Anvil & Holder Assy	12254	12234
3	1	Collet	20911	20911
4	1	Super-Grip Jaw Assy	30545-S3	30656-S3
5	1	Cap	60428	60428
6	1	Anvil Adapter	70331	70331
7	1	Jam Nut	70336	70336
8	1	Roll Pin	70468	70468
9	1	Collet Adapter	70332	70332
10	1	Barbed Retainer	60440	60440
11	1	Deflector	61107	61107