



NOSE ASSEMBLY DATA SHEET

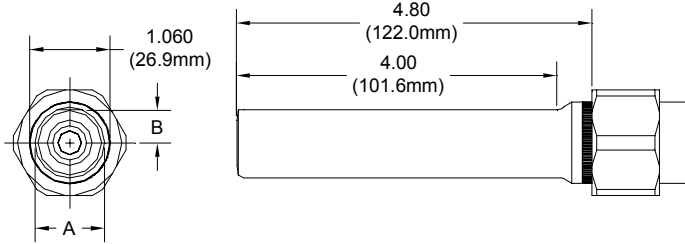

Use Hex-Key in rear of piston for nose assembly attachment.

- A 08 - .75 (19.1mm)
 10 - .92 (23.4mm)
 12 - 1.06 (26.9mm)
- B 08 - .35 (8.9mm)
 10 - .43 (10.9mm)
 12 - .48 (12.2mm)

Slots on retaining nut stop, supplied with tool, fit over ears on anvil assembly

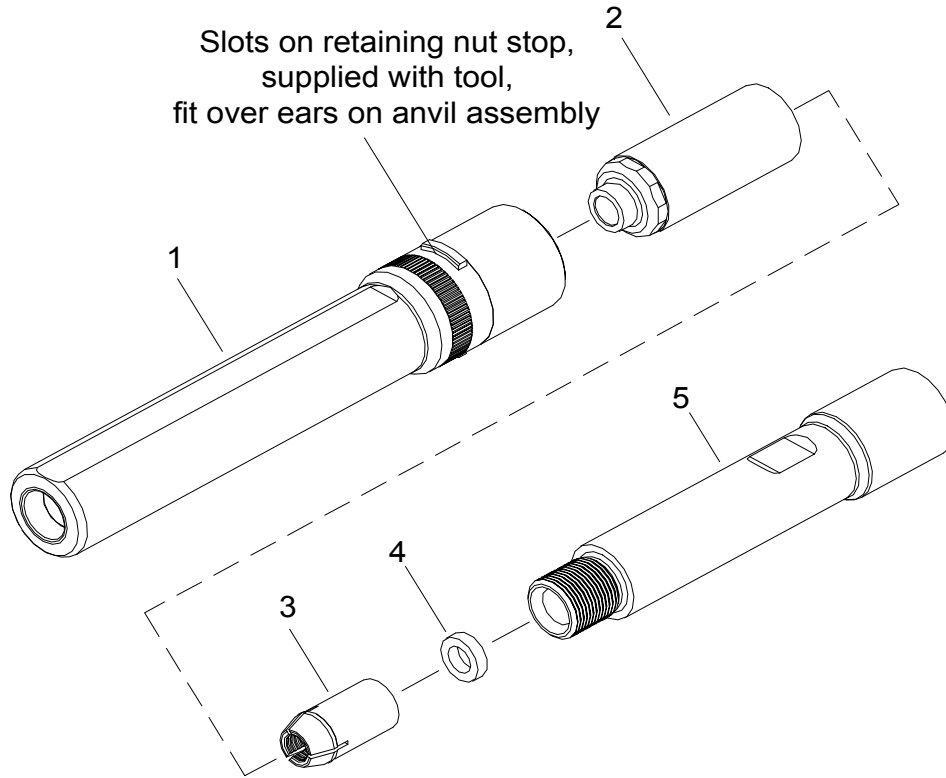

Rev. 10/05



*Anvil Assembly includes 35308 retainer.

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive (586) 771-7664
 Warren, Mi 48088 (586) 771-2665 Fax
 e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GBP745D	
Non Self-Releasing 1/4, 5/16 & 3/8 Ø		NAS Shear and NAS Tension Pull Type Lockbolts, C6L & GP® lockbolts		Alternate Tools: GBP4801	
Ref. No.	Qty.	Description	NAS08-745B-48	NAS10-745B-48	NAS12-745B-48
1	1	Anvil	18802	11023	11222
2	1	Collet	20666	21019	21224
3	1	Super-Grip Jaw Assembly	30861-S1	31022-S	31221-S
4	1	Spacer	----	31022-S	31221-S
5	1	Collet Extension	70837	71021	71220