
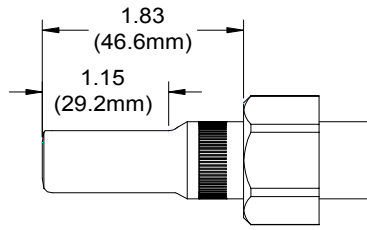


NOSE ASSEMBLY DATA SHEET




Use Hex-Key in rear of piston
for Nose Assembly attachment.

A 05- .635 (16.1mm)
06- .705 (17.9mm)

B 05- .290 (7.4mm)
06- .320 (8.1mm)

Slots on retaining nut stop,
supplied with tool,
fit over ears on anvil assembly

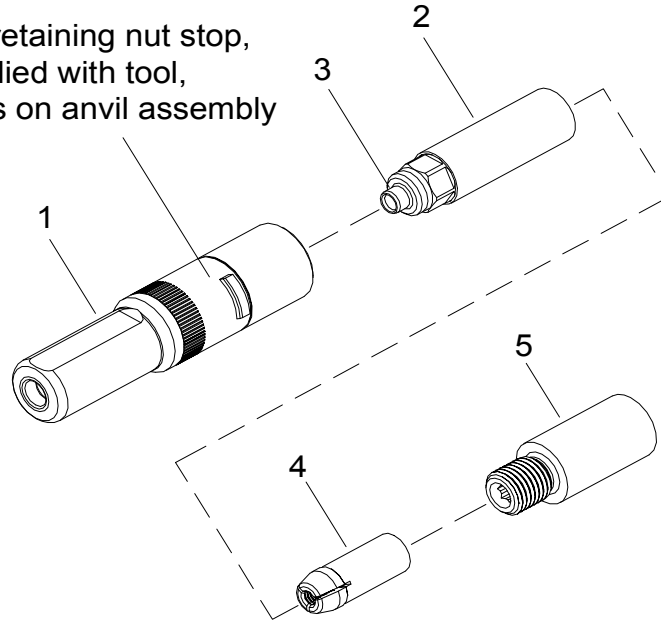

12/09 REV. 4/13

*Anvil Assembly includes 35208

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:	
Self-Releasing 5/32" & 3/16" Ø		¹ NAS Shear and ² NAS Tension Pull Type Lockbolts, C6L® & ¹ GP® Lockbolts		GBP731	
Ref. No.	Qty.	Description	¹ NASS05-352B-20	² NAST05-352B-20	NAS06-352B-20
1	1	Anvil Assembly	10585	10565	16601
2	1	Collet Assembly (Includes #3)	20588	20588	26610
3	1	Release & Ejector	80510	80510	80620
4	1	Super-Grip Jaw Assembly	30543-S5	30543-S5	30654-S6
5	1	Collet Extension	70550	70550	70636

GP® AND C6L® ARE REGISTERED TRADEMARKS OF ALCOA INC.