



NOSE ASSEMBLY DATA SHEET

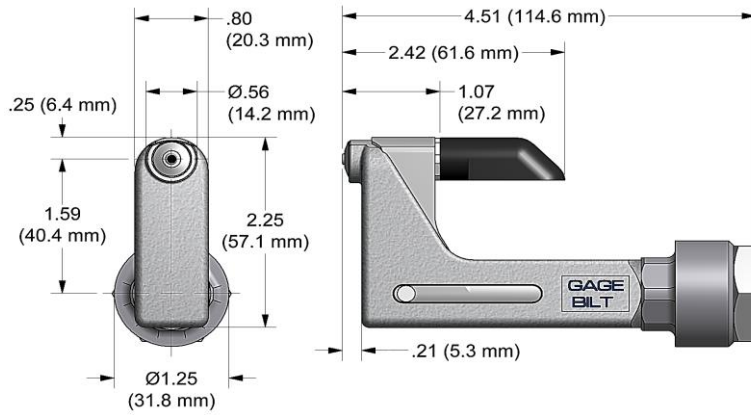

CAUTION:
Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment :
Screw jam nut (70336) on nose fitting of tool at least 3/4". Screw nose assembly onto nose fitting of tool until it stops, then back off until nose is in desired position. (Warning: Do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70331).

WARNING:
KEEP FINGERS AND HANDS AWAY FROM NOSE ASSEMBLY DURING OPERATION TO PREVENT SEVERE PERSONAL INJURY.

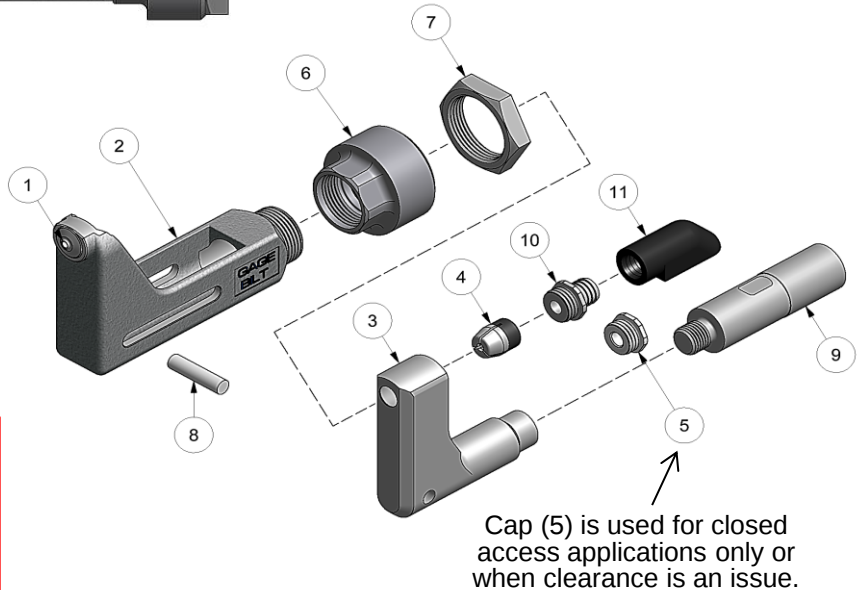

*SMLS08-752A-430S is designed for aluminum fasteners only.
**Use Adapter 745751 & DO NOT use # (7) Jam Nut 70336.

9/06 Rev. 4/15



GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp., MI 48038 (586) 226-1505 Fax
e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB751		
Non Self-Releasing 1/8", 5/32", 3/16" & 1/4" Ø		BLIND RIVET (SINGLE ACTION) WITH OR W/OUT DRIVE WASHER NAS1900 S & U SERIES		Alternate Tools: GB722 & **GB745		
Ref. No.	Qty.	Description	SMLS04-752A-430S	SMLS05-752A-430S	SMLS06-752A-430S	*SMLS08-752A-430S
1	1	Nose Tip	10485	15596	16023	10868
2	1	Anvil & Holder Assy	12203	12204	12205	12206
3	1	Collet	20911	20911	20911	20911
4	1	Super-Grip Jaw Assy	30425-S2	30545-S4	30656-S3	30864-S16
5	1	Cap	60428	60428	60428	60428
6	1	Anvil Adapter	70331	70331	70331	70331
7	1	Jam Nut	70336	70336	70336	70336
8	1	Pin	70468	70468	70468	70468
9	1	Collet Adapter	70332	70332	70332	70332
10	1	Barbed Retainer	60440	60440	60440	60440
11	1	Deflector	61107	61107	61107	61107