



NOSE ASSEMBLY DATA SHEET

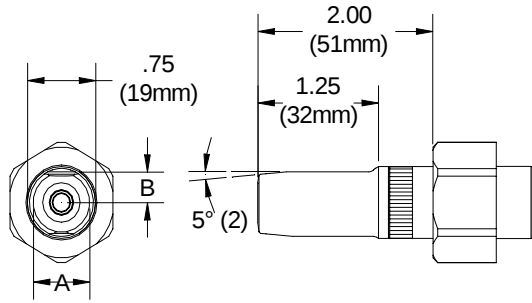

A 05-.635 (16.1mm)
06-.705 (17.9mm)
08-.750 (19.1mm)

B 05-.290 (7.4mm)
06-.320 (8.1mm)
08-.350 (8.9mm)

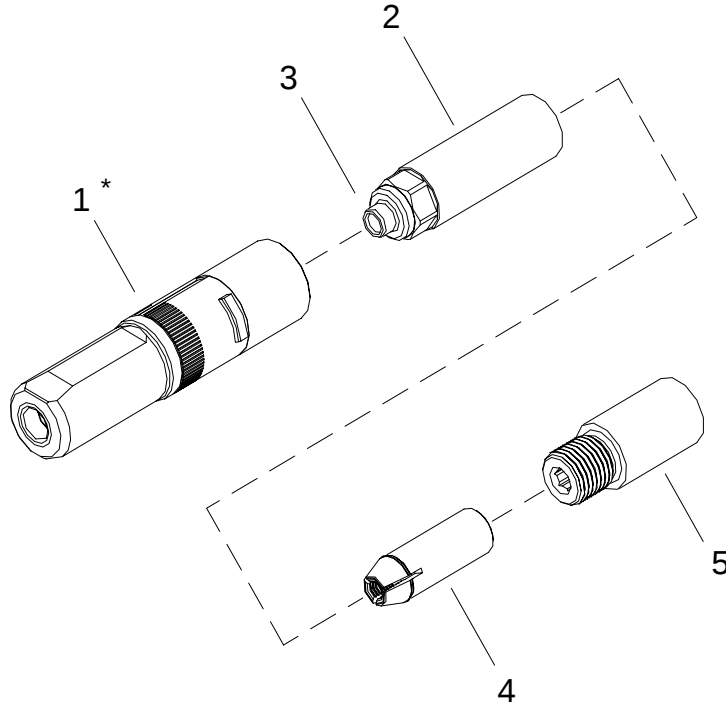

Use Hex-Key in rear of piston
for nose assembly attachment.

Use Hex-Key in rear of collet-
extension for collet disassembly.

4/02

* Anvil Assembly includes 35208 retainer.
3. GBP730B for 1/4 Aluminum Max.

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive
Warren, Mi 48088

(586) 771-7664
(586) 771-2665 Fax

e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:
Self-Releasing
Chisel-Nose
5/32, 3/16 & 1/4 Ø

Fastener:
¹NAS Shear and
²NAS Tension Pull Type
Lockbolts, C6L & ¹GP® Lockbolts

Recommended Tool:
³GBP730B / GBP712
Alternate Tool:
GBP2400B

Ref. No.	Qty.	Description	¹ NASS05-352A-20C	² NAST05-352A-20C	NAS06-352A-20C	³ NAS08-352A-20C
1	1	Anvil Assembly	10578	10574	16608	18809
2	1	Collet Assembly (Inc. #2 & #9)	20566	20566	20685	20897
3	1	Release & Ejector	80510	80510	80620	80813
4	1	Super-Grip Jaw Assembly	30542-S1	30542-S1	30651-S1	30858-S1
5	1	Extension-Collet	70550	70550	70636	70835