



NOSE ASSEMBLY DATA SHEET

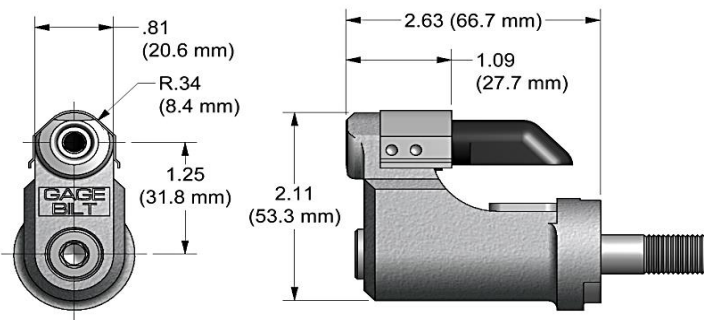

CAUTION:
Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (8) use for closed access applications only or when clearance is an issue!

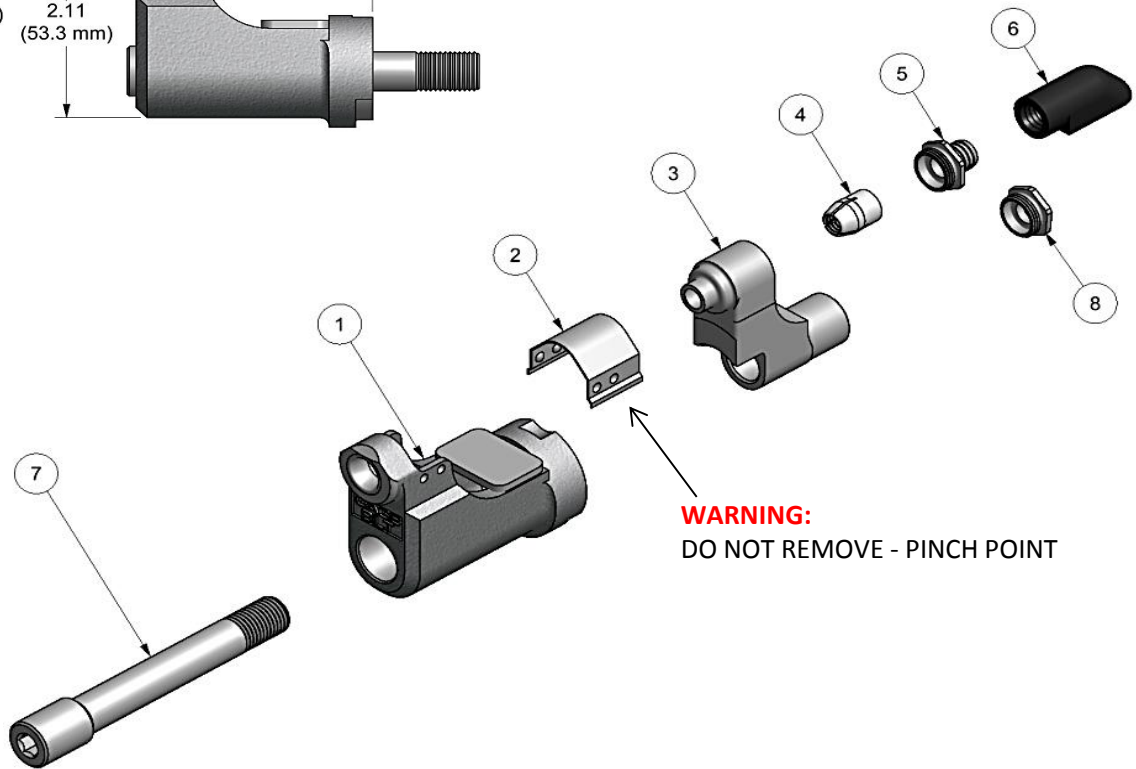

ASSEMBLY INSTRUCTIONS:

Disconnect tool from power source. On front of GB206-375(A) Installation tool, remove screw and stop. Place collet in anvil. Apply Vibra-TITE® part no. 405124 to threads on drawbar. Slide drawbar thru anvil and collet. Install assembly on tool. Using a 1/4" hex wrench, screw drawbar into piston until tight. Replace screw and stop on tool.

11/14



*Use Adapter No. 751206
**Use Adapter No. 353206

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.
44766 Centre Court (586) 226-1500
Clinton Twp., MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
1/4" Ø		GP®, NAS Shear and NAS Tension Lockbolts	GB206-375
			Alternate Tools: *GB731 & **GB745
Ref. No.	Qty.	Description	NAS08-206G-25OS
1	1	Anvil Assembly	18830
2	1	Guard	60426
3	1	Collet	20886
4	1	Super-Grip Jaw Assembly	30862-S5
5	1	Barbed Retainer	70569
6	1	Deflector	61107
7	1	Drawbar	71141
8	1	Cap	70571