



NOSE ASSEMBLY DATA SHEET

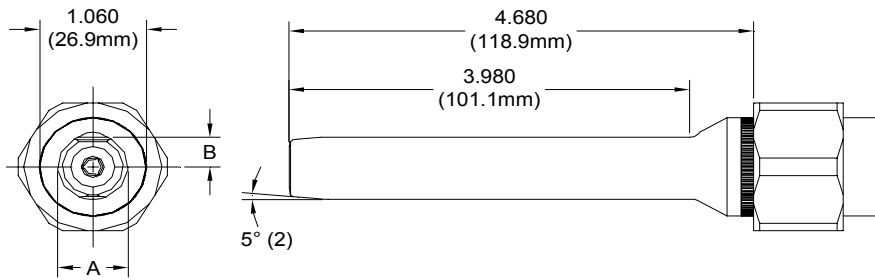

Use Hex-Key in rear of piston for nose assembly attachment.

- A 05-.635 (16.1mm)
06-.705 (17.9mm)
- B 05-.290 (7.4mm)
06-.320 (8.1mm)

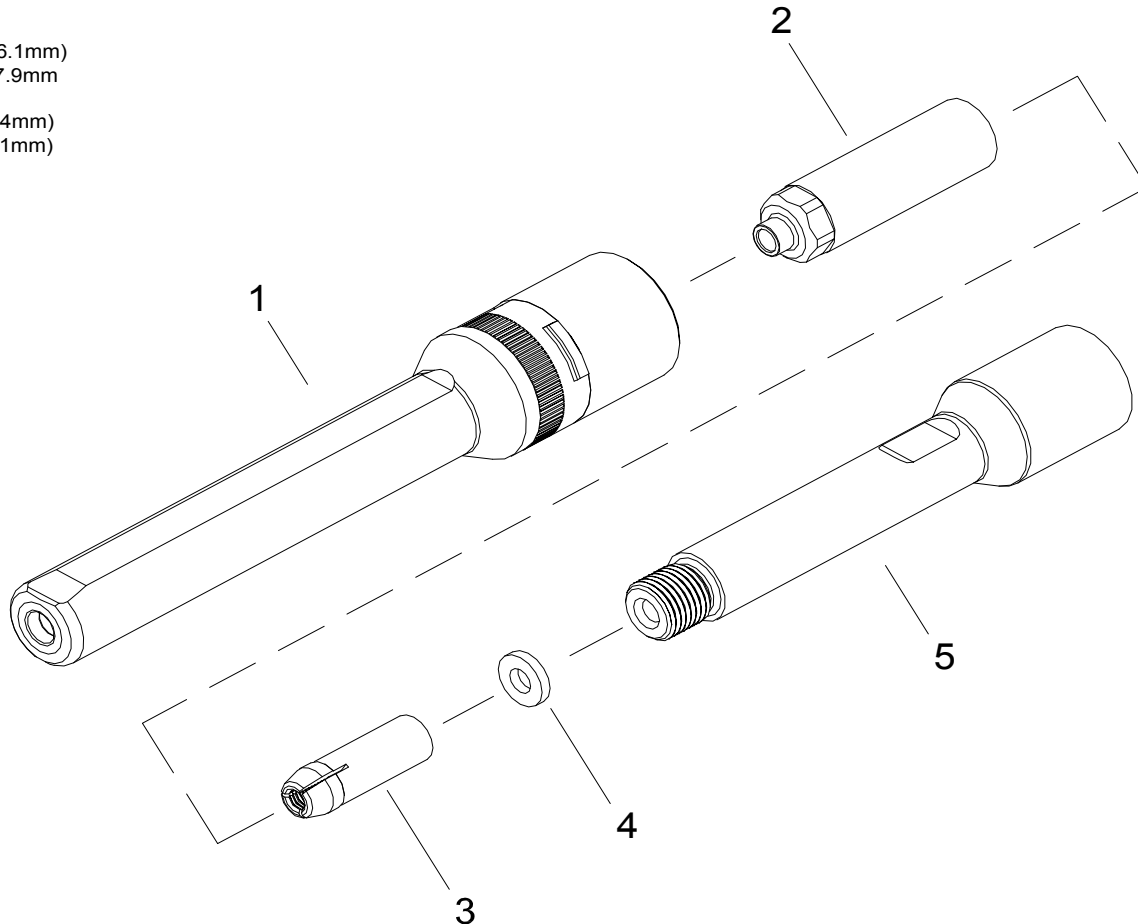

5/05

*Anvil Assembly includes 35308 retainer.

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive (586) 771-7664
Warren, Mi 48088 (586) 771-2665 Fax
e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:	
Non Self-Releasing 5/32 & 3/16 Ø		**NAS Shear and ***NAS Tension Pull Type Lockbolts, C6L & **GP® lockbolts		GBP745C	
				Alternate Tools: GBP4801	
Ref. No.	Qty.	Description	**NASS05-755-48CN	***NAST05-755-48CN	NAS06-755-48CN
1	1	Anvil	10581	10577	16615
2	1	Collet	20583	20583	26605
3	1	Super-Grip Jaw Assembly	30543-S	30543-S	30654-S
4	1	Spacer	----	----	60615
5	1	Collet Extension	70553	70553	70638