


NOSE ASSEMBLY DATA SHEET

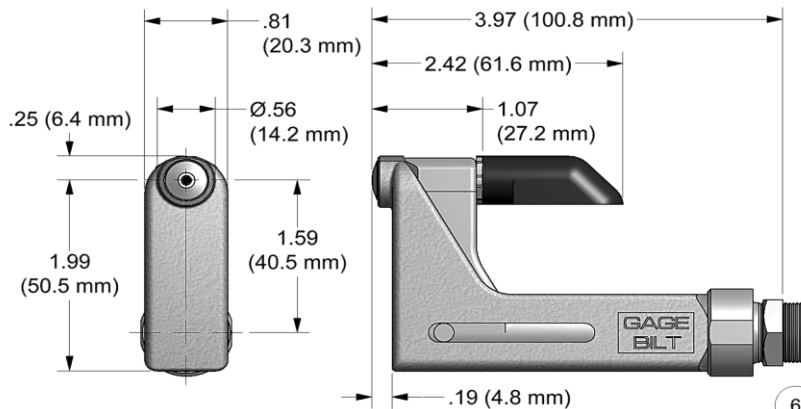


CAUTION:
Do not operate if pintail deflector is removed. Pintail may eject forcibly.
SEVERE PERSONAL INJURY MAY RESULT.

Attachment:

Apply blue Loctite® 242 to anvil adapter (6) and adapter-collet (9) threads. Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70411) against adapter (70346)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE

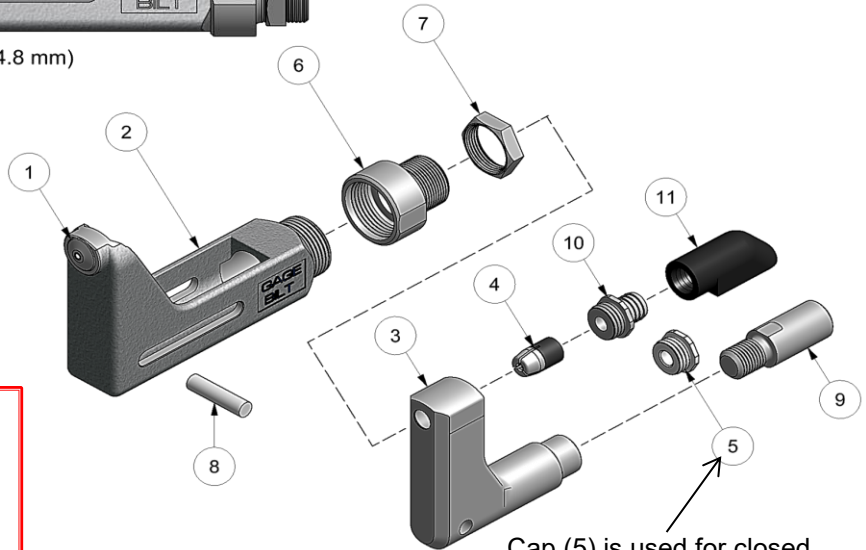

Cap (5) is used for closed access applications only or when clearance is an issue.

10/17 REV 10/25



*GB715 will pull 5/32" & 3/16" fasteners in aluminum only.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:			Recommended Tool: *GB715	
Non Self-Releasing 3/32", 1/8", 5/32" & 3/16" Ø		"A" CODE NAS1398A, NAS1399A NAS1738A, NAS1739A				
Ref. No.	Qty.	Description	3A- 715A-400S	4A- 715A-400S	*5A- 715A-400S	*6A- 715A-400S
1	1	Anvil Insert	13001	10488	15001	16028
2	1	Anvil & Holder Assembly (Inc. #1)	12034	12035	12036	12037
3	1	Collet	20914	20911	20911	20911
4	1	Super-Grip Jaw Assembly	30314-S7	30425-S2	30545-S4	30656-S3
5	1	Cap	60428	60428	60428	60428
6	1	Anvil Adapter	70346	70346	70346	70346
7	1	Jam Nut	70411	70411	70411	70411
8	1	Pin	70468	70468	70468	70468
9	1	Adapter-Collet	70340	70340	70340	70340
10	1	Barbed Retainer	60440	60440	60440	60440
11	1	Deflector	61107	61107	61107	61107

LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.