


NOSE ASSEMBLY DATA SHEET

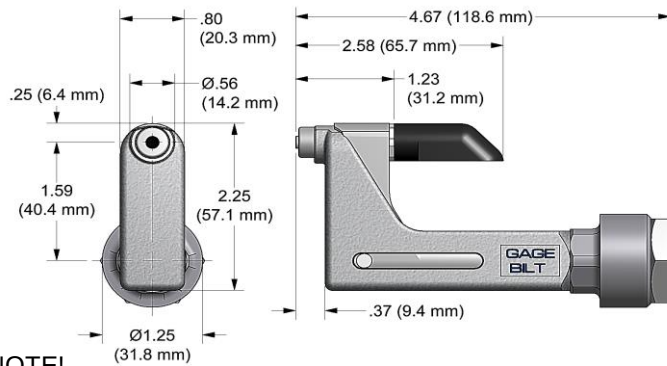

CAUTION:
Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.


NOTE!

Use with driver:
ASP-06 for 13/64" dia.
ASP-08 for 17/64" dia.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70331)

WARNING:
KEEP FINGERS AND HANDS AWAY FROM NOSE ASSEMBLY DURING OPERATION TO PREVENT SEVERE PERSONAL INJURY.

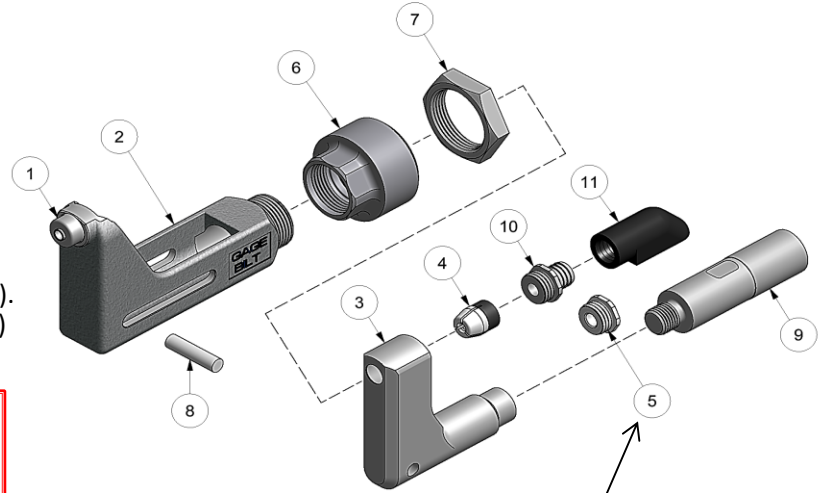

Cap (5) is used for closed access applications only or when clearance is an issue.

10/07 REV. 4/15



*USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:
Non Self-Releasing 13/64" & 17/64" Ø		2 ASP®, ASP PF, ASP FF, ASP F & ASP LC		GB752
				Alternate Tools: GB722, GB731 & *GB745
Ref. No.	Qty.	Description	ASP06-752A-430S	ASP08-752A-430S
1	1	Cap Assy	10142	10143
2	1	Anvil & Holder Assy	12280	12281
3	1	Collet	20911	20911
4	1	Jaw Set	30656-S3	30864-S5
5	1	Cap	60428	60428
6	1	Anvil Adapter	70331	70331
7	1	Jam Nut	70336	70336
8	1	Pin	70468	70468
9	1	Collet Adapter	70332	70332
10	1	Barbed Retainer	60440	60440
11	1	Deflector	61107	61107

ASP® IS A REGISTERED TRADEMARK OF ALCOA INC.