


NOSE ASSEMBLY DATA SHEET

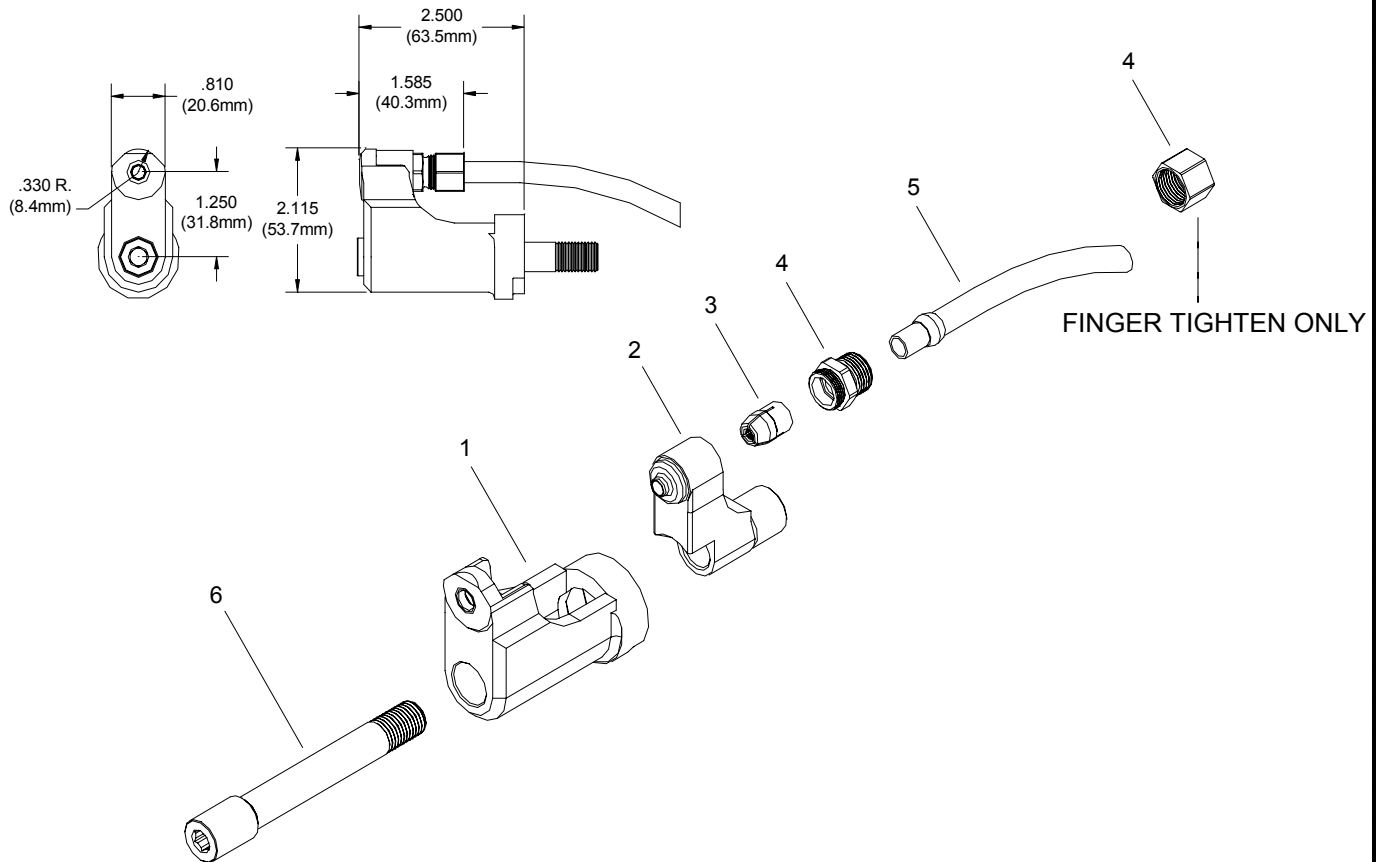

NOTE:
Yellow logo designates nose assy's.
for lightweight GP fasteners.

ASSEMBLY INSTRUCTIONS:

On front of GBP206A-375 Installation Tool remove screw and stop. With collet placed in anvil, install on tool. Slide draw bar thru anvil and collet. Screw draw bar into piston until it stops. Replace screw and stop on tool.

* Use Adapter No. 352206.

** Use Adapter No. 353206.

*** Use Adapter No. 352206 with 712152 stroke limiter.

10/01

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive (586) 771-7664
Warren, Mi 48088 (586) 771-2665 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GBP206A-375 Alt. Tools: *GBP730B **GBP745B, ***GBP712	
Non Self Releasing 5/32, 3/16 & 1/4 Ø		LGP® lockbolts			
Ref. No.	Qty.	Description	LGP05- 206D-250T	LGP06- 206D-250T	LGP08- 206D-250T
1	1	Anvil-Swaging	15540	16627	18829
2	1	Collet	20550	20662	20885
3	1	Super Grip Jaw Assembly	30543-S2	30654-S2	30862-S2
4	1	Cap Assy.	70560	70560	70560
5	1	Deflector Tube Assy.	61104	61104	61104
6	1	Draw Bar	71120	71120	71120

LGP® is a registered trademark of Huck Int'l Inc.