




NOSE ASSEMBLY DATA SHEET



Use Hex-Key in rear of piston
for nose assembly attachment.

Slots on retaining nut stop, supplied with installation
tool, fit over ears on anvil assembly

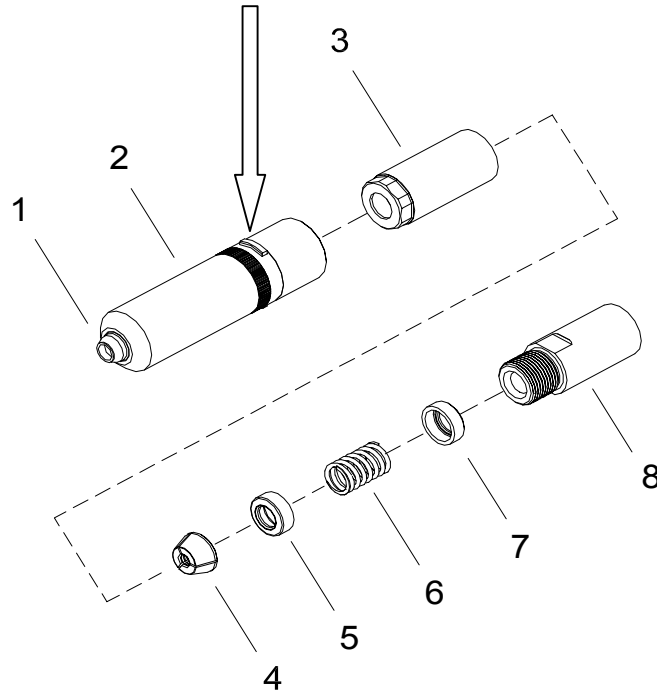

9/04

*100 psi required for alloy steel (MS90353 & MS90354).

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive (586) 771-7664
Warren, Mi 48088 (586) 771-2665 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:			Fastener: MS90353 S & U MS90354 S & U MS21140 S & U MS21141 S & U	Recommended Tool: *GBP745C
Non Self-Releasing 5/16" Ø				Alternate Tools: GBP4801 & GBP4804
Ref. No.	Qty.	Description		SB10-4801A-28
1	1	Anvil Insert		11054
2	1	Anvil Assembly (Includes #1)		11160
3	1	Collet		21103
4	1	Jaw Set		31013
5	1	Follower		41219
6	1	Spring		51218
7	1	Sleeve		61212
8	1	Collet Extension		71219