


NOSE ASSEMBLY DATA SHEET

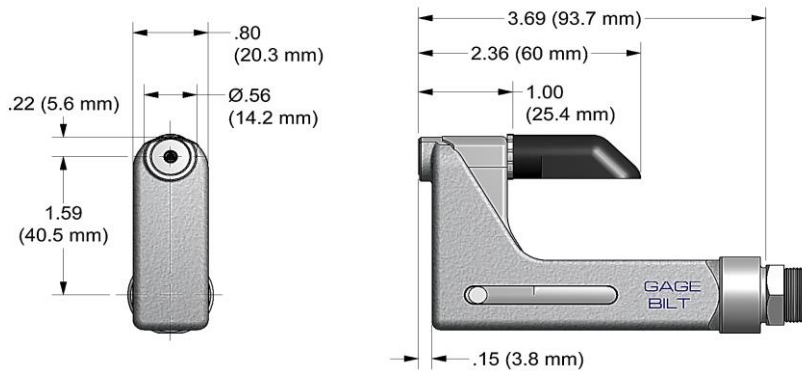


CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70411) against adapter (70341)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

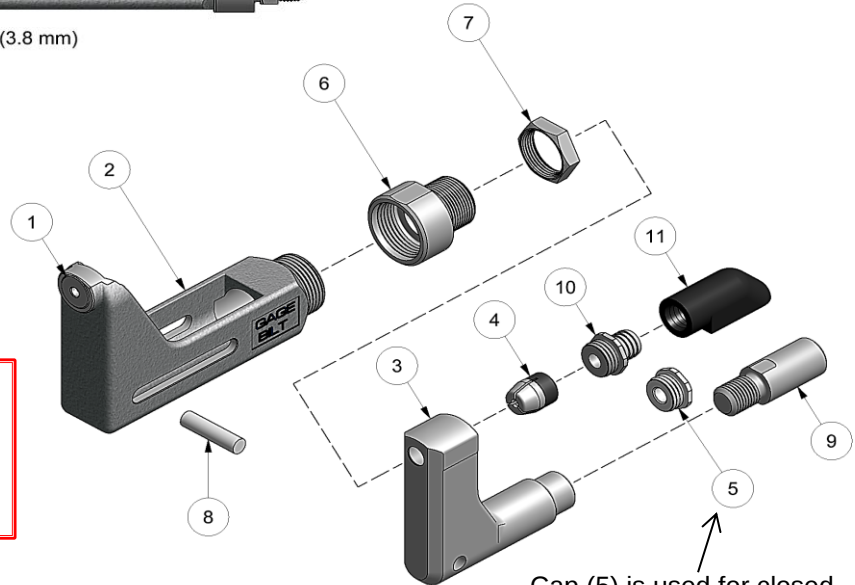

Cap (5) is used for closed access applications only or when clearance is an issue.



11/14 REV 4/15

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: GB715
Non Self-Releasing 1/8" Ø		MS90353S & U & MS90354S & U MS21140S & U & MS21141S & U "U" TYPE BLIND BOLT WITH DRIVE WASHER	Alternate Tools: GB51
Ref. No.	Qty.	Description	UBB04-715-400S
1	1	Anvil-Driving	15598
2	1	Anvil & Holder Assy	12254
3	1	Collet	20914
4	1	Super-Grip Jaw Assy	30425-S2
5	1	Cap	60428
6	1	Anvil Adapter	70341
7	1	Jam Nut	70411
8	1	Roll Pin	70468
9	1	Collet Adapter	70340
10	1	Barbed Retainer	60440
11	1	Deflector	61107