





NOSE ASSEMBLY DATA SHEET



Use Hex-Key in rear of piston for nose assembly attachment.

1. Drop jaws #3 into collet #2.
2. Thread assembly onto piston and snug with wrench on collet #2 and hex key (provided with tool) into rear of piston.
3. Slide anvil #1 over assembled collet #2.
4. Slide retaining nut stop and nut from tool over anvil #1 and tighten.

SLOTS ON RETAINING NUT STOP, SUPPLIED WITH TOOL, FIT OVER EARS ON ANVIL ASSY

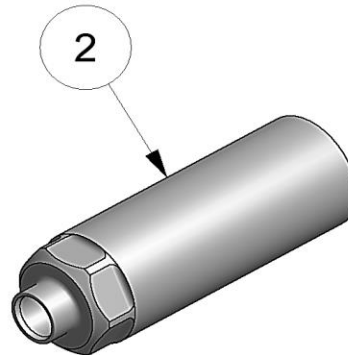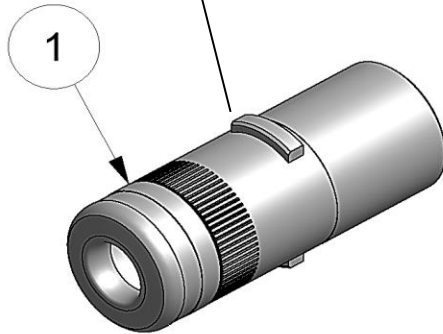

11/15 Rev. 3/17

*Anvil Assembly includes 35208 retainer.

**Yellow band designates nose assemblies for lightweight GP® fasteners.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 1/4" Ø		LGP® Lockbolts ASNA2391-4 ASNA2392-4	GB731
			Alternate Tools: GB730 & GB2480(A)
Ref. No.	Qty.	Description	LGP08-2480-10
1	1	Anvil	18816
2	1	Collet	20877
3	1	Super-Grip Jaw Assy	30858-S2