


NOSE ASSEMBLY DATA SHEET

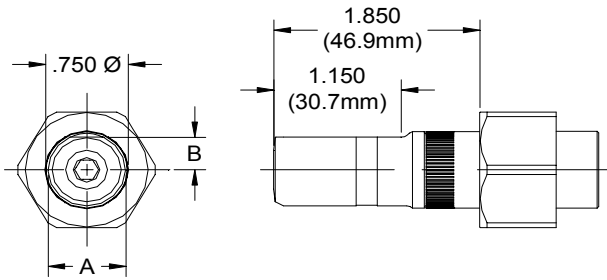


A 05-.635 (16.1mm)
06-.705 (17.9mm)

B 05-.290 (7.4mm)
06-.320 (8.1mm)

Use Hex-Key in rear of piston
for Nose Assembly attachment.

DO NOT USE
RETAINING NUT STOP
FOR SELF-RELEASING
NOSE ASSEMBLIES

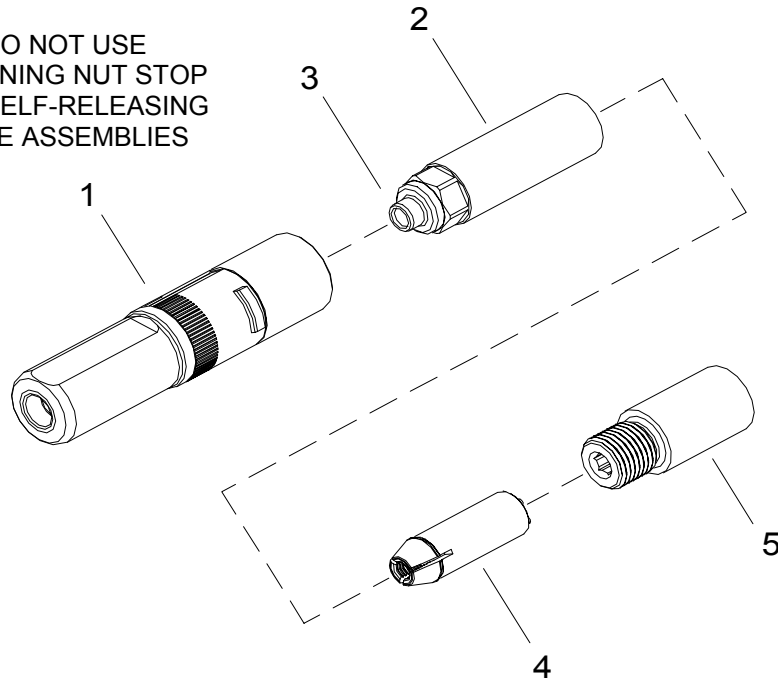

Rev. 12/08

*Anvil Assembly includes 35208

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp., MI 48038 (586) 226-1505 Fax
e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB731	
Self-Releasing 5/32" & 3/16" Ø		¹ NAS Shear and ² NAS Tension Pull Type Lockbolts, C6L® & ¹ GP® Lockbolts		Alternate Tools: GB731	
Ref. No.	Qty.	Description	¹ NASS05- 352A-20	² NAST05- 352A-20	NAS06- 352A-20
1	1	Anvil Assembly	10585	10565	16601
2	1	Collet Assembly (Includes #3)	20566	20566	20685
3	1	Release & Ejector	80510	80510	80620
4	1	Super-Grip Jaw Assembly	30542-S1	30542-S1	30651-S1
5	1	Collet Extension	70550	70550	70636

GP® AND C6L® ARE REGISTERED TRADEMARKS OF ALCOA INC.