



NOSE ASSEMBLY DATA SHEET

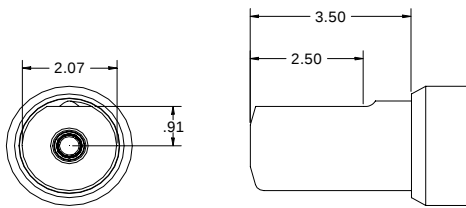

1. Drop sleeve into tool adapter.
2. Hand screw collet onto piston until it stops.
3. Unscrew collet to align ball lock assembly with closest groove on piston. Screw in set screw.
4. Slide anvil over collet.
5. Slide nut over anvil and tighten.

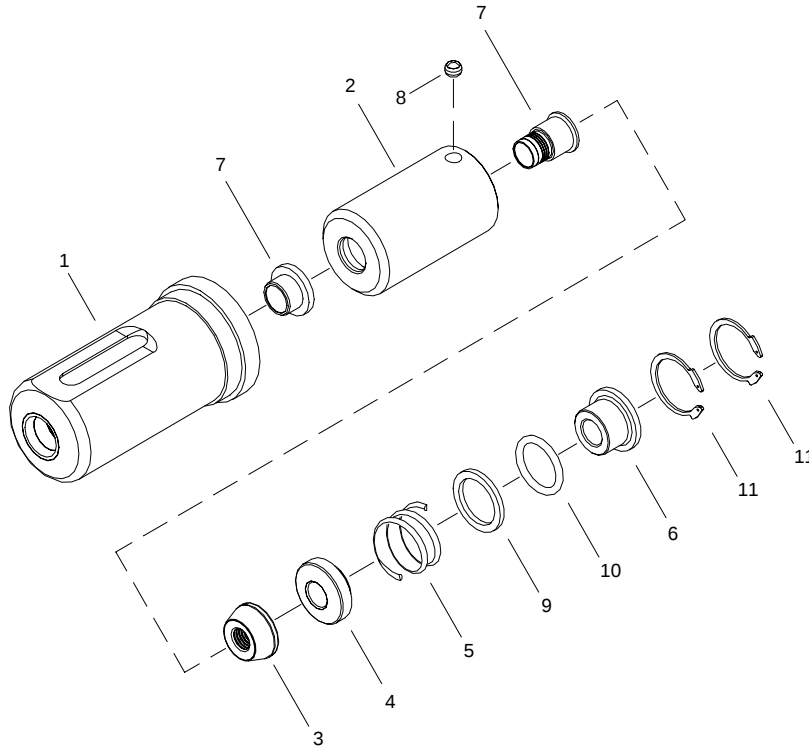

11/96 Rev. 6/01

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive (586) 771-7664
 Warren, Mi 48088 (586) 771-2665 Fax
 e-mail: solutions@gagebilt.com / www.gagebilt.com

Type:		Fastener:	Recommended Tool:	
Self-Releasing 1/2 Ø		C50L	GBP7500A	
Ref. No.	Qty.	Description		16-7500-41
1	1	Anvil		11610
2	1	Collet Assy (Inc. 7 & 8)		21608
3	1	Jaw Set		31601
4	1	Follower		41608
5	1	Spring		52001
6	1	Sleeve		61611
7	1	Release & Ejector Kit		81600
8	1	Ball Lock Assembly		54502
9	1	Spacer		55020
10	1	O'Ring		400846
11	2	Retaining Ring		402263