


NOSE ASSEMBLY DATA SHEET

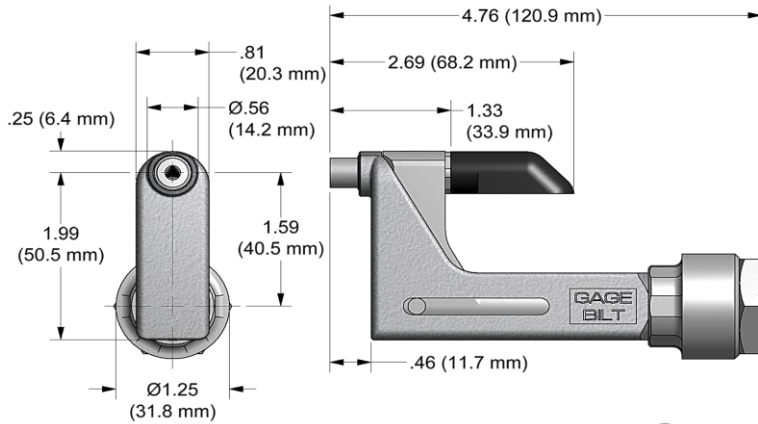


CAUTION:
Do not operate if pintail deflector is removed. Pintail may eject forcibly.
SEVERE PERSONAL INJURY MAY RESULT.

Attachment:

Apply blue Loctite® 242 to anvil adapter (6) and adapter-collet (9) threads. Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70344).

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

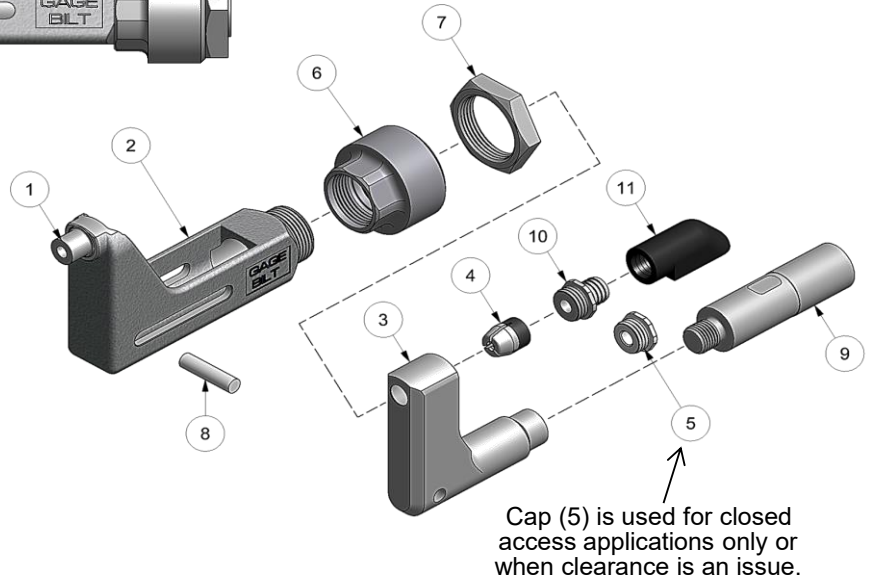

11/17 REV 10/25



*USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 8-32 Ø		GROUND STUD, M83454 & BACS53B	GB751
			Alternate Tools: GB722 & *GB745
Ref. No.	Qty.	Description	GS8-752B-430S
1	1	Anvil Insert	18011
2	1	Anvil Holder	12386
3	1	Collet	20911
4	1	Super-Grip Jaw Assembly	30545-S4
5	1	Cap	60428
6	1	Anvil Adapter	70344
7	1	Jam Nut	70336
8	1	Pin	70468
9	1	Adapter-Collet	70332
10	1	Barbed Retainer	60440
11	1	Deflector	61107

LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.