



NOSE ASSEMBLY DATA SHEET

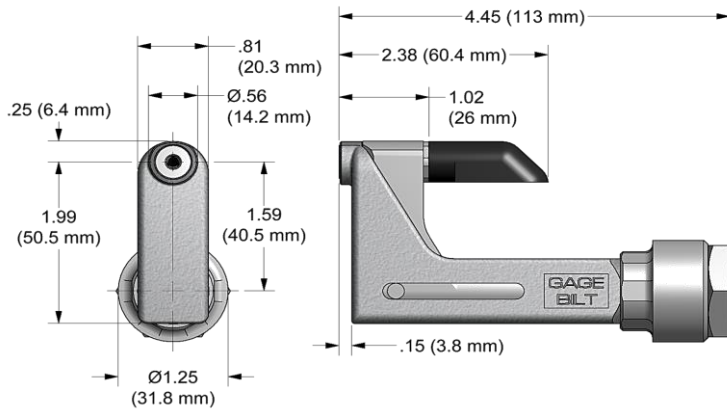

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70344)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

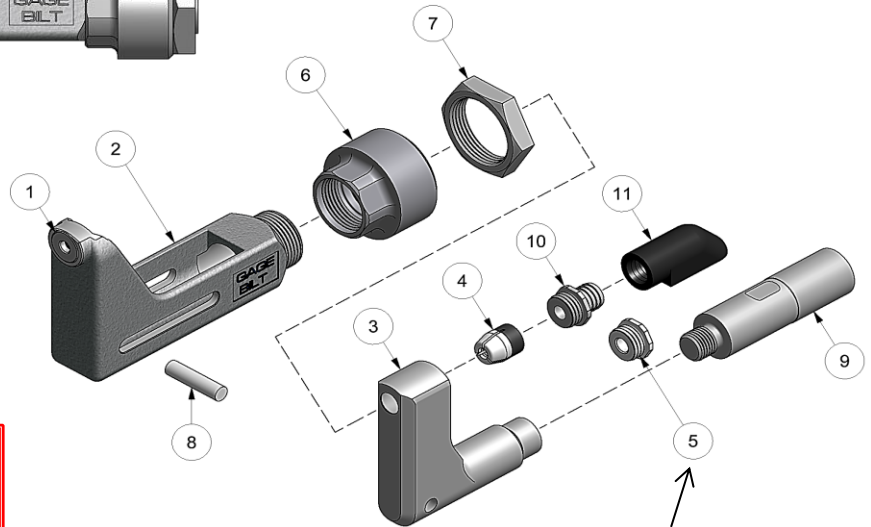

CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Cap (5) is used for closed access applications only or when clearance is an issue.



11/17

*USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 5/32"Ø		EN6122 & UAB130-EU / EN6127 & UAB6127-EU EN6128 & UAB100-EU / EN6129 & UABP-EU	GB751
Ref. No.	Qty.	Description	UAB05-752B-430S
1	1	Anvil-Driving	15598
2	1	Anvil & Holder Assy	12044
3	1	Collet	20911
4	1	Super-Grip Jaw Assy	30545-S3
5	1	Cap	60428
6	1	Anvil Adapter	70344
7	1	Jam Nut	70336
8	1	Roll Pin	70468
9	1	Collet Adapter	70332
10	1	Barbed Retainer	60440
11	1	Deflector	61107