



NOSE ASSEMBLY DATA SHEET

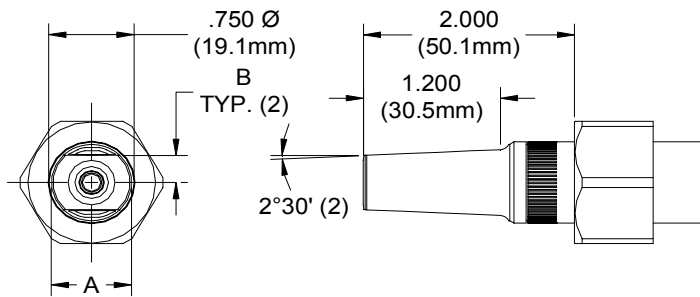

Use Hex-Key in rear of piston for nose assembly attachment.

A 05-.635 (16.1mm)
06-.705 (17.9mm)

B 05-.220 (5.6mm)
06-.235 (6.0mm)

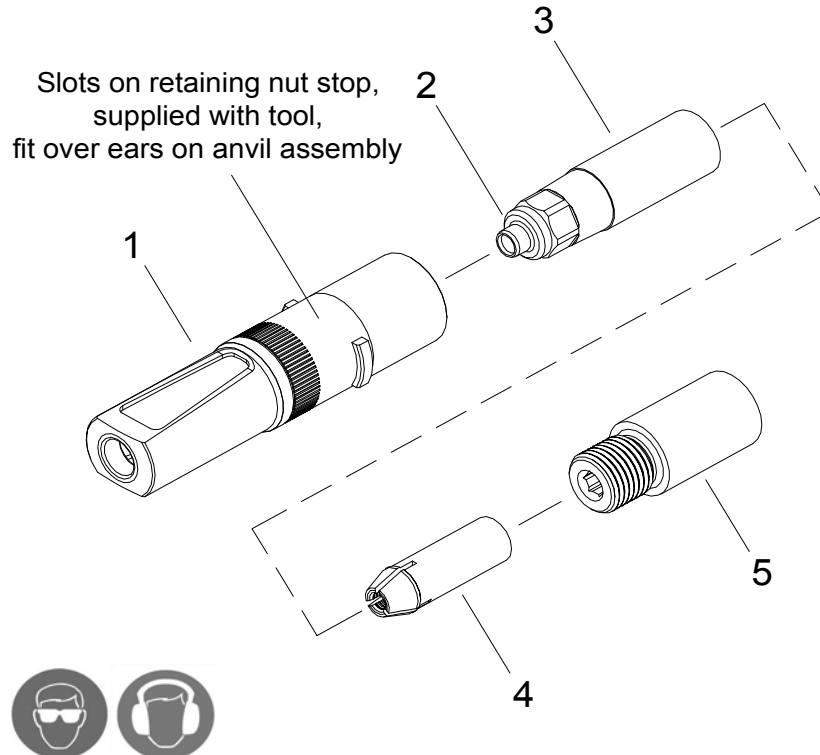

8/07 REV. 4/13

*Anvil Assembly includes 35208 retainer.

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GBP731	
Self-Releasing 5/32 & 3/16 Ø		**NAS Shear and ***NAS Tension Pull Type Lockbolts, C6L® & **GP® lockbolts		Alternate Tools: GBP2480	
Ref. No.	Qty.	Description	**NASS05- 352A-20MDCN	***NAST05- 352A-20MDCN	NAS06- 352A-20MDCN
1	1	Anvil Assembly	10578-1	10574-1	16608-1
2	1	Collet Assembly (Incl. #3)	20566-1	20566-1	20685-1
3	1	Release & Ejector	80510	80510	80620
4	1	Super-Grip Jaw Assembly	30542-S1	30542-S1	30651-S1
5	1	Collet Extension	70550	70550	70636