



NOSE ASSEMBLY DATA SHEET

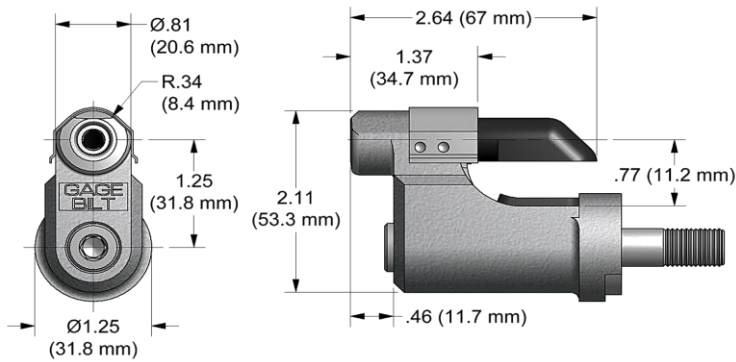

CAUTION:
Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (8) use for closed access applications only or when clearance is an issue!

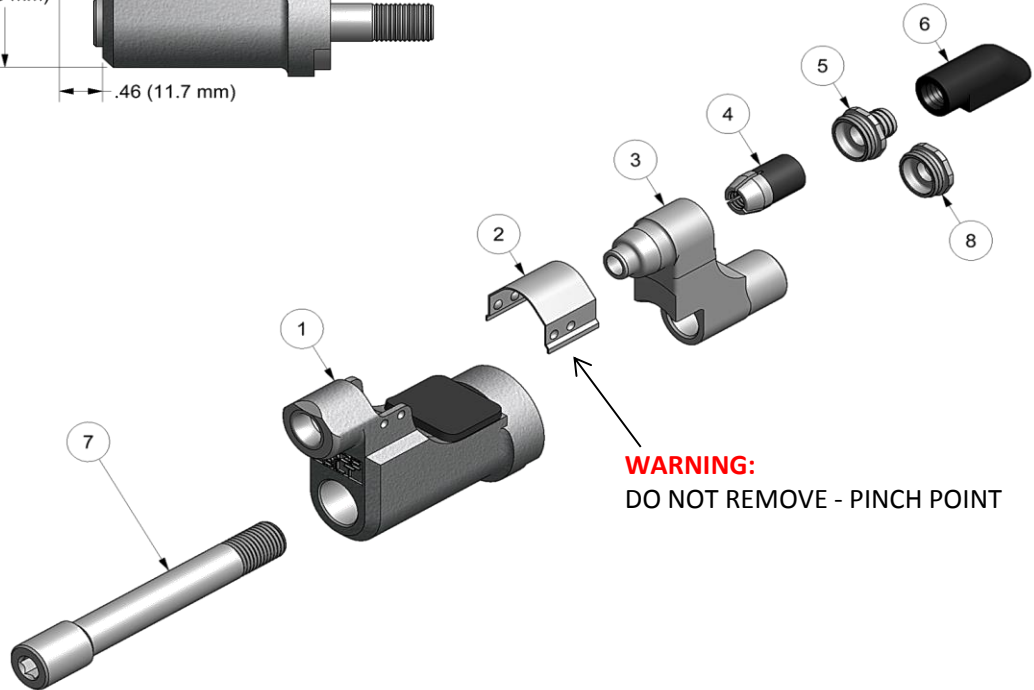

WARNING:
DO NOT REMOVE - PINCH POINT

ASSEMBLY INSTRUCTIONS:

Disconnect tool from power source. On front of GB206-500(A) Installation tool, remove screw and stop. Place collet in anvil. Apply Vibra-TITE® part no. 405124 to threads on drawbar. Slide drawbar thru anvil and collet. Install assembly on tool. Using a 1/4" hex wrench, screw drawbar into piston until tight. Replace screw and stop on tool.

9/17



*Use Adapter No. 751206 (Not for tension alloy or titanium).
**Use Adapter No. 353206

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:	
1/4" Ø		NAS Shear and *NAS Tension Pull Type Lockbolts & GP® Lockbolts		GB206-500	
				Alternate Tools: *GB731 & **GB745	
Ref. No.	Qty.	Description		NAS08-206H-300S	
1	1	Anvil Assembly		18841	
2	1	Guard		60426	
3	1	Collet		28840	
4	1	Super-Grip Jaw Assy		30875-S1	
5	1	Barbed Retainer		70654	
6	1	Deflector		61107	
7	1	Drawbar		71141	
8	1	Cap		70655	