


NOSE ASSEMBLY DATA SHEET

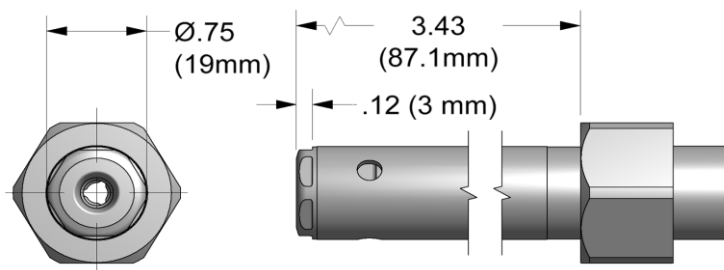


ASSEMBLY:

Notes:

- Apply Vibra-tite® p/n 405125 to all thread and allow it to set 20 minutes prior to assembly.
- Tighten extension-collet (6) to piston on tool 80 - 100 IN-LBS. (.36 - .44 Kn) torque.
- If nose assy is assembled as it is when purchased new, follow steps 3 - 5 to attach to tool.
 - Insert super grip jaw assy (5) into rear of collet (4).
 - Thread collet (4) to extension-collet (6) and tighten using flats provided.
 - Thread assembled collet (4) and extension-collet (6) onto piston of tool and tighten using flats provided and hex in rear of piston.
 - Slide anvil & holder assembly (1) over collet (4).
 - Slide retaining nut from tool (Note: Retaining nut stop not used on this nose assembly) over anvil & holder assembly (1) and tighten nose assy to tool.

DISASSEMBLY:

Reverse assembly instructions.

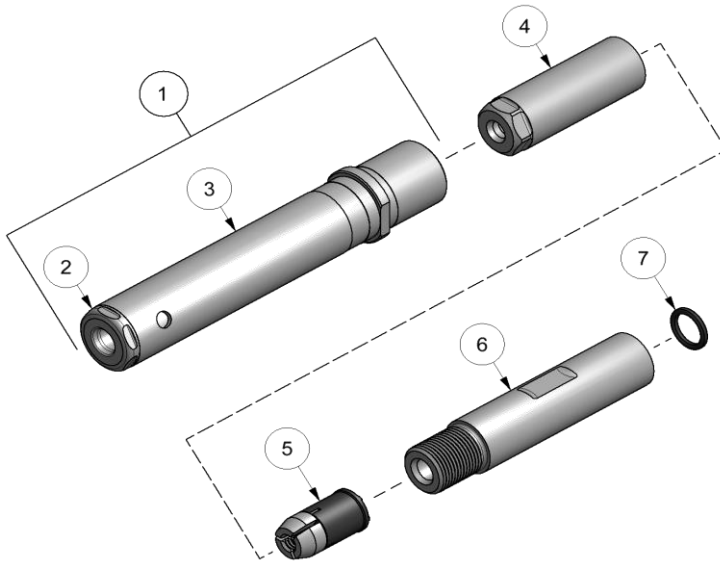

6/15 REV 9/25

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 3/16 Ø		MAGNA-GRIP®, MULTI-GRIP, MAXLOK® LOCKBOLTS	GB713
			Alternate Tool: GB722 & GB2480(A)
Ref. No.	Qty.	Description	MG06-722-34
1	1	Anvil & Holder Assembly	16032
2	1	Anvil	16634
3	1	Holder	12241-10
4	1	Collet	20636
5	1	Super-Grip Jaw Assembly	30652-S
6	1	Extension-Collet	70673
7	1	O'Ring	400778

MAGNA-GRIP® IS A REGISTERED TRADEMARK OF HOWMET AEROSPACE. MAXLOK® IS A REGISTERED TRADEMARK OF AVDEL UK LIMITED. VIBRA-TITE® IS A REGISTERED TRADEMARK OF OAKLAND CORPORATION.