



NOSE ASSEMBLY DATA SHEET

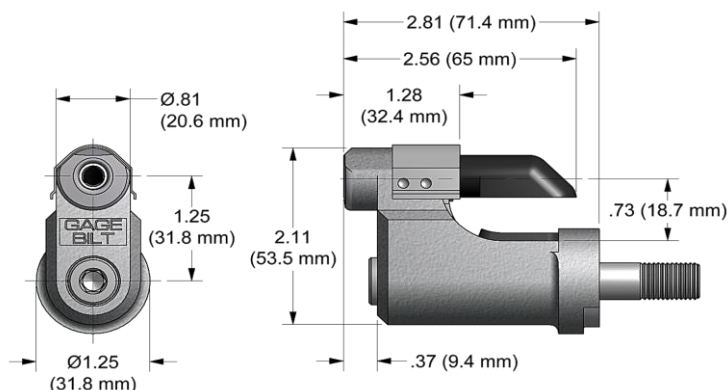

CAUTION:
Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (8) use for closed access applications only or when clearance is an issue!

NOTE:

Yellow logo designates nose assy's for lightweight GP® fasteners.

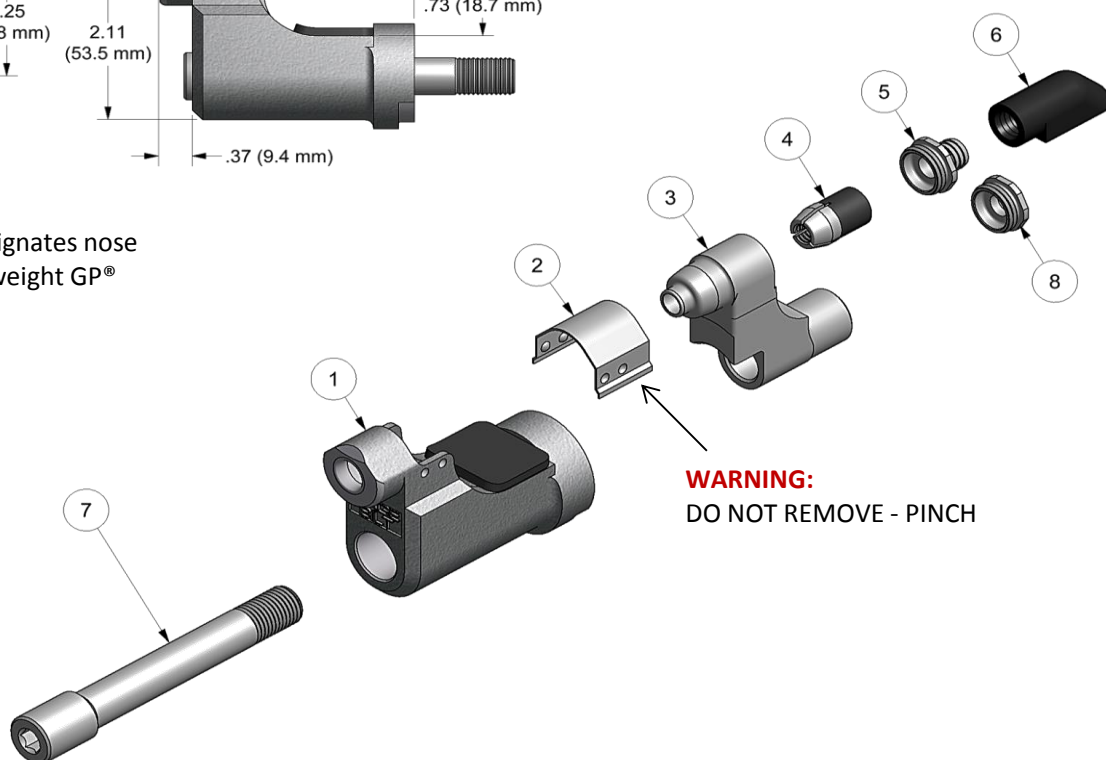

ASSEMBLY INSTRUCTIONS:

Disconnect tool from power source. On front of GB206-500(A) Installation tool, remove screw and stop. Place collet in anvil. Apply Vibra-TITE® part no. 405124 to threads on drawbar. Slide drawbar thru anvil and collet. Install assembly on tool. Using a 1/4" hex wrench, screw drawbar into piston until tight. Replace screw and stop on tool.



*Use Adapter No. 751206.

**Use Adapter No. 353206.

9/17

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 1/4" Ø		LGP® Lockbolt	GB206-500(A)
			Alternate Tools: *GB731 & **GB745
Ref. No.	Qty.	Description	LGP08-206G-300S
1	1	Anvil Assy (Inc. 61108 Rubber Guard)	18849
2	1	Guard	60426
3	1	Collet	28834
4	1	Super-Grip Jaw Assy	30875-S
5	1	Barbed Retainer	70654
6	1	Deflector	61107
7	1	Drawbar	71141
8	1	Cap	70655