


NOSE ASSEMBLY DATA SHEET

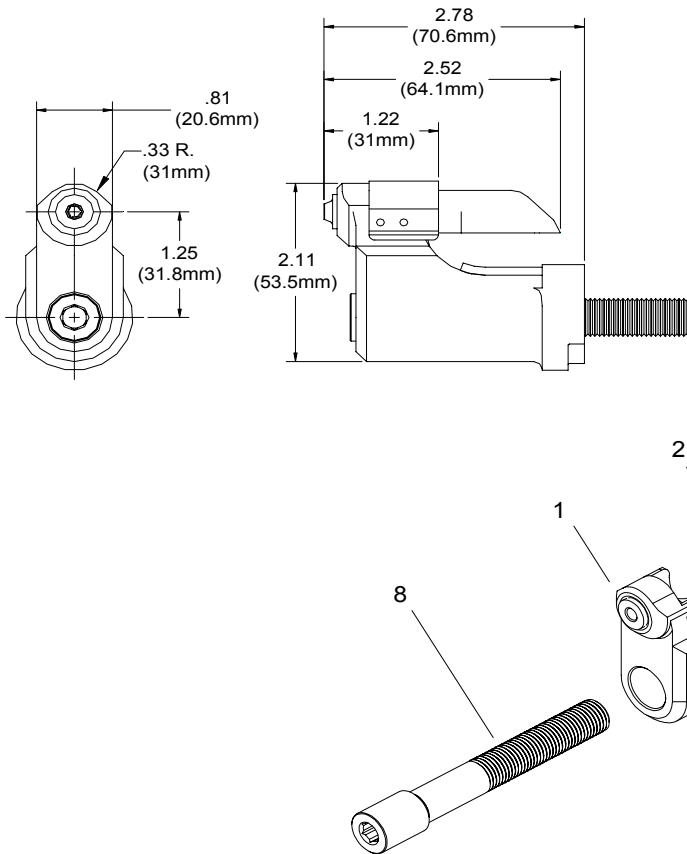

CAUTION:
Pintail may eject forcibly. USE DEFLECTOR TO PREVENT SEVERE PERSONAL INJURY. Cap (10) use for closed access applications only or when clearance is an issue!

ASSEMBLY INSTRUCTIONS:

On front of GBP206-375 Installation Tool remove screw and stop. With collet placed in anvil, install on tool. Slide drawbar thru anvil and collet. Screw nut on rear of draw bar. Screw draw bar into piston until it stops. Replace screw and stop on tool.



*Use Adapter No. 751206 (-8 aluminum only).

**Use Adapter No. 353206.

***Use Adapter No. 751206 with 713152 stroke limiter.

Rev. 2/11

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp., MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GBP206-375/206-375A	
Non Self-Releasing 5/32", 3/16" & 1/4" Ø		MS90353S & U, MS90354S & U MS21140S & U, MS21141S & U CR 7000 SERIES, BACB30YY, YU, & YT		Alternate Tools: *GB752, **GBP745D & ***GBP713D	
Ref. No.	Qty.	Description	SB05-206G-27OS	SB06-206G-27OS	SB08-206G-27OS
1	1	Anvil Insert	10562	10683	10867
2	1	Anvil Assembly (Inc. #1)	10972	10973	10974
3	1	Guard	60426	60426	60426
4	1	Collet	20722-1	20722-1	20722-1
5	1	Super-Grip Jaw Assembly	30545-S12	30655-S8	30863-S4
6	1	Barbed Retainer	70569	70569	70569
7	1	Deflector	61107	61107	61107
8	1	Drawbar	71120	71120	71120
9	1	Nut	70546	70546	70546
10	1	Cap	70571	70571	70571