


NOSE ASSEMBLY DATA SHEET

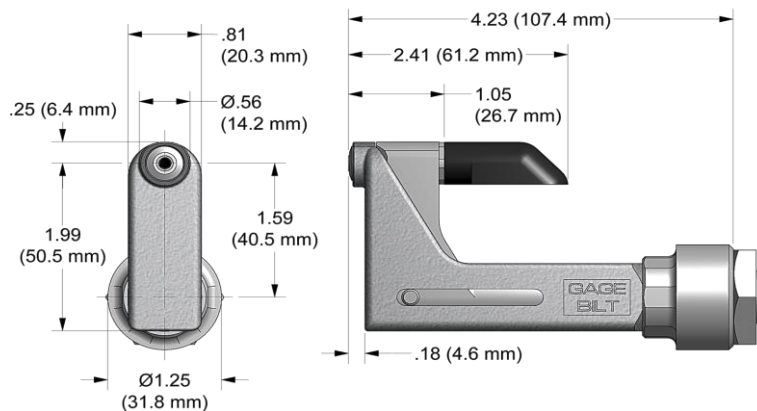


CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly.
SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Apply blue Loctite® 242 to anvil adapter (6) and adapter-collet (9) threads. Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70344)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

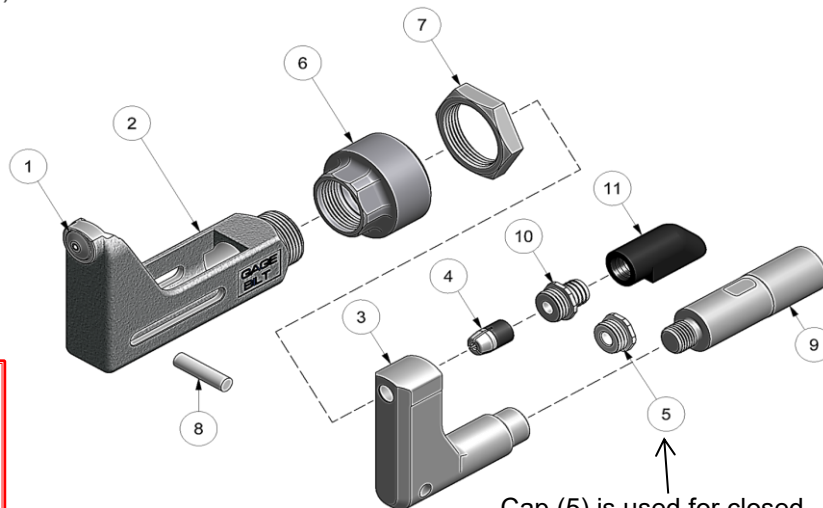

Cap (5) is used for closed access applications only or when clearance is an issue.



10/17 REV 9/25

**USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool:	
Non Self-Releasing *3/16" Ø		"A" CODE NAS1398A, NAS1399A NAS1738A, NAS1739A		GB751	
				Alternate Tools: GB722 & **GB745	
Ref. No.	Qty.	Description		6A-752B-430S	
1	1	Anvil Insert		16028	
2	1	Anvil & Holder Assembly (Inc. #1)		12037	
3	1	Collet		20911	
4	1	Super-Grip Jaw Assembly		30656-S3	
5	1	Cap		60428	
6	1	Anvil Adapter		70344	
7	1	Jam Nut		70336	
8	1	Pin		70468	
9	1	Adapter-Collet		70332	
10	1	Barbed Retainer		60440	
11	1	Deflector		61107	

LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.