


NOSE ASSEMBLY DATA SHEET

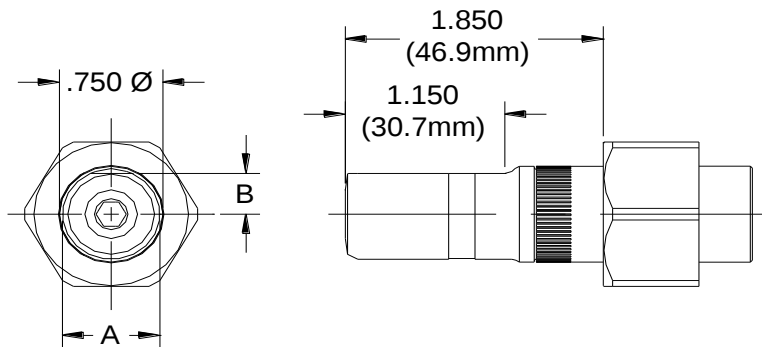


Use Hex-Key in rear of piston for nose assembly attachment.

A 05-.635 (16.1mm)
06-.705 (17.9mm)
08-.750 (19mm)

B 05-.290 (7.4mm)
06-.320 (8.1mm)
08-.350 (8.9mm)

Slots on retaining nut stop, supplied with tool, fit over ears on anvil assembly

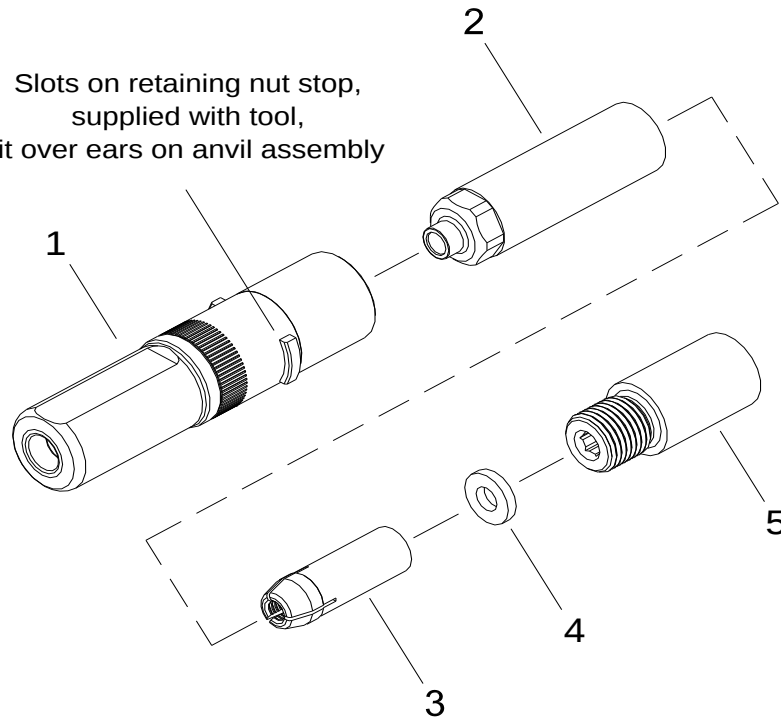

3/05 Rev. 3/14

*Anvil Assembly includes 35208 retainer.

GAGE BILT

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp., MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:		Recommended Tool: GB731		
Non Self-Releasing 5/32, 3/16 & 1/4 Ø		**NAS Shear and ***NAS Tension Pull Type Lockbolts, C6L® & **GP® lockbolts		Alternate Tools: GB730 & GB2480		
Ref. No.	Qty.	Description	**NASS05-731-20	***NAST05-731-20	NAS06-731-20	NAS08-731-20
1	1	Anvil	10585	10565	16601	10890
2	1	Collet	20583	20583	26605	28841
3	1	Super-Grip Jaw Assembly	30543-S	30543-S	30654-CS	30861-S1
4	1	Spacer	-----	-----	60615	60832
5	1	Collet Extension	70550	70550	70636	70835