


NOSE ASSEMBLY DATA SHEET

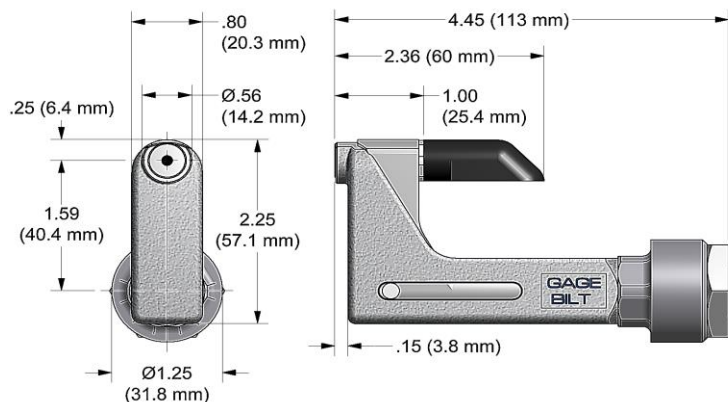


CAUTION:

Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70331)

WARNING:
KEEP FINGERS AND HANDS AWAY
FROM NOSE ASSEMBLY DURING
OPERATION TO PREVENT SEVERE
PERSONAL INJURY.

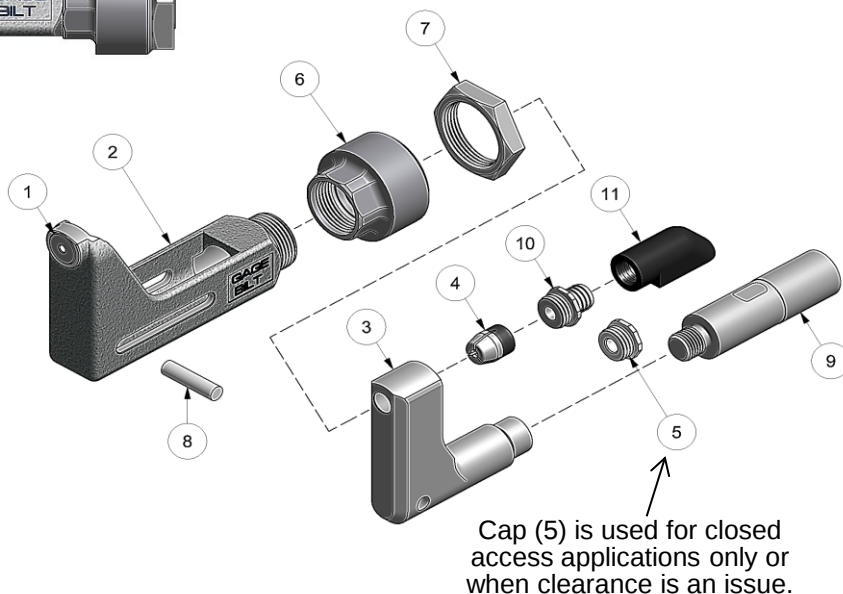

*UBR08-752A-430S is designed for aluminum fasteners only.
**Use Adapter #745751 & DO NOT use # (7) Jam Nut 70336.

REV 4/15

GAGE BILT
MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 1/4" Ø		UNIMATIC® SINGLE ACTION NAS1919S & U/NAS1921S & U WITH DRIVE WASHER	GB751
			Alternate Tools: GB722 & **GB745
Ref. No.	Qty.	Description	*UBR08-752A-430S
1	1	Nose Tip	18013
2	1	Anvil & Holder Assy	12256
3	1	Collet	20911
4	1	Super Grip Jaw Assy	30864-S16
5	1	Cap	60428
6	1	Anvil Adapter	70331
7	1	Jam Nut	70336
8	1	Pin	70468
9	1	Collet Adapter	70332
10	1	Barbed Retainer	60440
11	1	Deflector	61107