



NOSE ASSEMBLY DATA SHEET

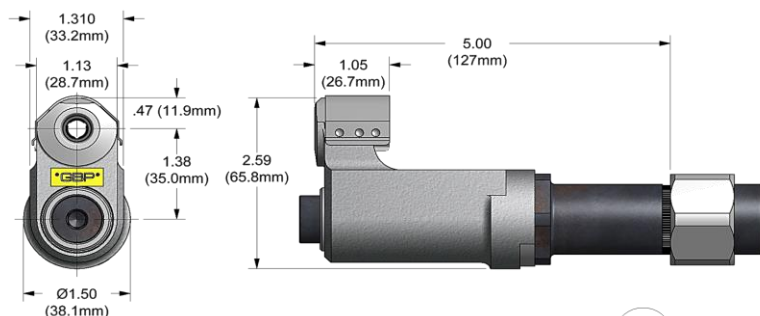

CAUTION:
Pintail may eject forcibly.
TO PREVENT SEVERE PERSONAL
INJURY, always use deflector!

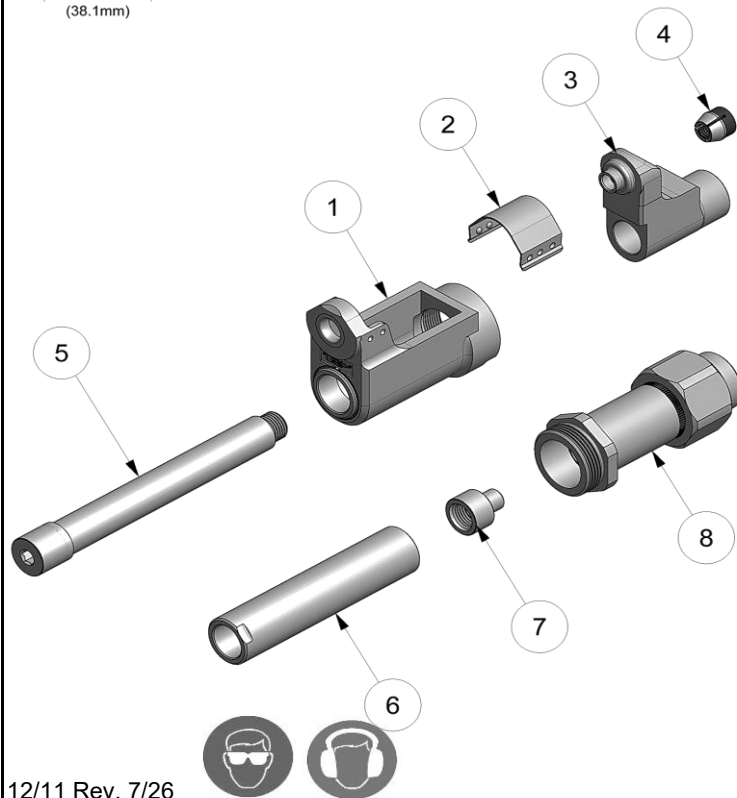

To attach nose assembly to tool:

1. Place adapter nut (7) into threaded end of collet adapter (6) with thread forward as shown. Thread collet adapter (6) onto head piston of tool.
2. With collet (3) placed in anvil (1), tighten both onto anvil adapter assembly (8).
3. Slide anvil adapter (8) over collet adapter (6) and lock into place on tool. Slide drawbar into nose assembly thru adapter assembly.
4. Using tee-wrench (9) thru rear of installation tool and 1/4" allen wrench on front of nose assembly drawbar tighten nut to drawbar.

*Shipped with 61105 & 752122 deflector.
Not shown.

12/11 Rev. 7/26

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 5/16" Ø		LGP® Lockbolts ASNA2391-5 ASNA2392-5	*GB756 must use 756156 Stroke Limiter
			Alternate Tools: **GB2581 must use 258154 Stroke Limiter 258158 Relief Valve.
Ref. No.	Qty.	Description	LGP10-756-500S
1	1	Anvil Assembly	11056
2	1	Guard	61018
3	1	Collet & Cap Assembly	21053
4	1	Super-Grip Jaw Assembly	31022-S6
5	1	Drawbar	71130
6	1	Collet Adapter	353216
7	1	Nut	353218
8	1	Anvil Adapter	353231
9	1	T-Wrench (not shown)	A-139

LGP® IS REGISTERED TRADEMARK OF HOWMET AEROSPACE.