



NOSE ASSEMBLY DATA SHEET

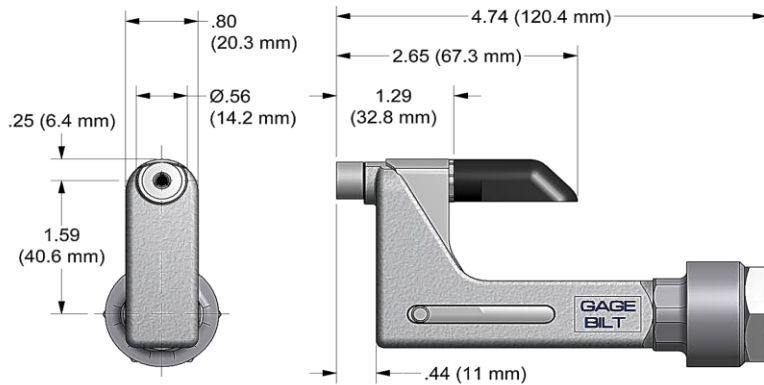

CAUTION:
Do not operate if pintail deflector is removed. Pintail may eject forcibly.
SEVERE PERSONAL INJURY MAY RESULT.

Attachment:

Apply blue Loctite® 242 to anvil adapter (6) and adapter-collet (9) threads. Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70344)

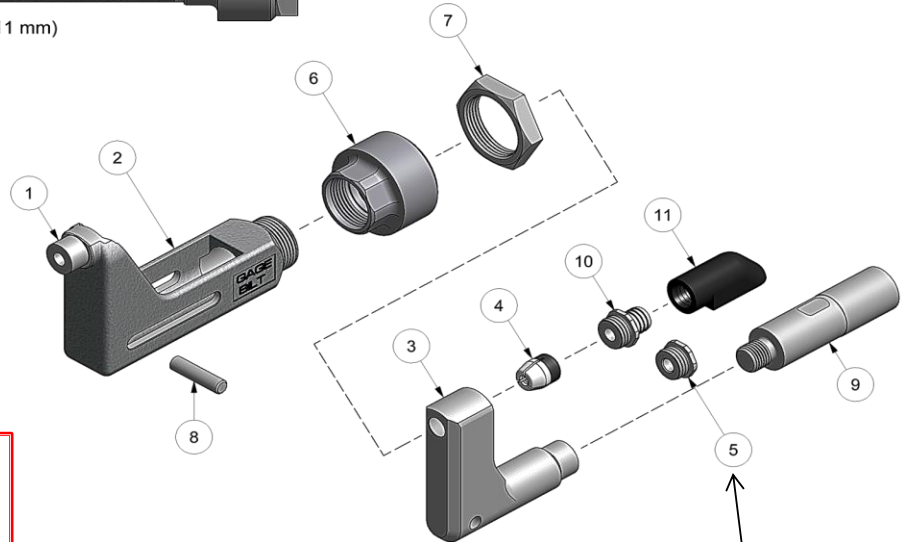

Cap (5) is used for closed access applications only or when clearance is an issue.

WARNING:
KEEP FINGERS AND HANDS AWAY FROM NOSE ASSEMBLY DURING OPERATION TO PREVENT SEVERE PERSONAL INJURY.



10/17 REV 10/25

*USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

GAGE BILT
MADE in USA

44766 Centre Court Clinton Twp. MI 48038 USA
Ph: +1 (586) 226-1500 Fax: +1 (586) 226-1505
solutions1@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool:
Non Self-Releasing 10-32 Ø		GROUND STUD, M83454 & BACS53B	GB751
			Alternate Tools: GB722 & *GB745
Ref. No.	Qty.	Description	GS10-752C-430S
1	1	Anvil-Driving	11080
2	1	Anvil & Holder Assembly (Incl. #1)	13018
3	1	Collet	20911
4	1	Super-Grip Jaw Assembly	30656-S3
5	1	Cap	60428
6	1	Pin	70468
7	1	Anvil Adapter	70344
8	1	Jam Nut	70336
9	1	Adapter-Collet	70332
10	1	Barbed Retainer	60440
11	1	Deflector	61107

LOCTITE® IS A REGISTERED TRADEMARK OF HENKEL CORPORATION.